

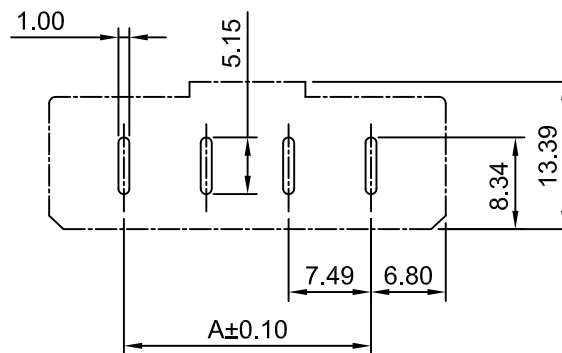
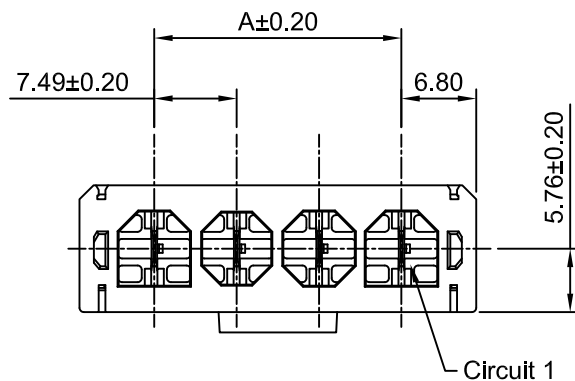



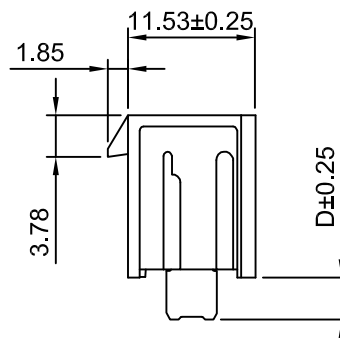

P.C.B LAYOUT

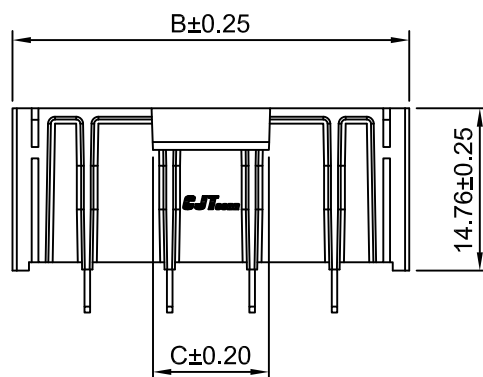

Ordering Information:

A7501WVC-XP - **

1 2

1.Part No.

2.Size D:

(Blank): D=3.81mm

D53: D=5.33mm

SPECIFICATIONS:

Current Rating: 30A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Solder Tabs:Brass/Gold over Nickel

Material:LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	7.49	21.08	3.10	5P	29.96	43.56	10.54
3P	14.98	28.58	3.10	6P	37.45	51.05	10.54
4P	22.47	36.07	10.54	8P	44.94	66.04	10.54

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit			Scale			Sheet			TITLE		
mm			1.5:1			1 of 1					
DRWN			CHK'D			APPR			7.49MM PITCH VERTICAL WAFER		
Chengbiao Ye			Diankui Wan			Jack Yin					
General Tolerances			THIRD ANGLE PROJECTION						DRAWING NO. A7501WVC-XP		
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°											
REV			A2								

A2	CHANGE THE DRAWING	2021.04.02
A1	CHANGE THE DRAWING	2021.04.02
A0	NEW RELEASE	2019.12.17
REV	DESCRIPTION	DATE