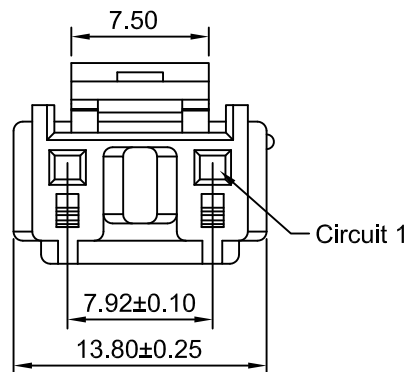


Ordering Information:

A7921HG-2P - ^{***}/₁ - ^{***}/₂ - ^{***}/₃

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0,IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): White

BK: Black

IV: Ivory

SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	2.5:1	1 of 1	7.92mm PITCH HOUSING		
DRWN	CHKD	APPR			
Wenmin Luo	DianKui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
				REV A0	
				A7921HG-2P	

A0	NEW RELEASE	2020.07.01
REV	DESCRIPTION	DATE