

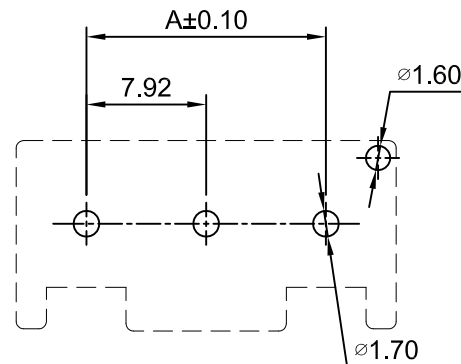
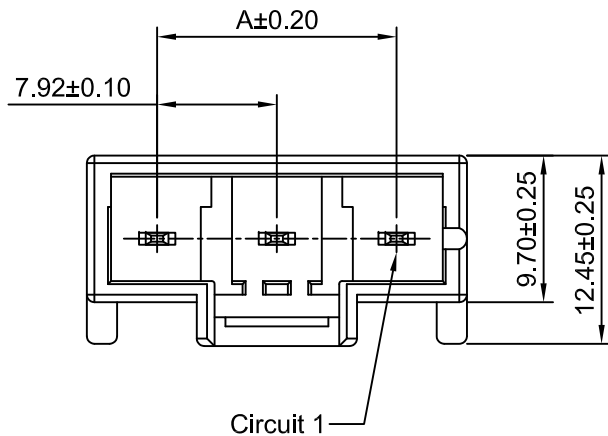





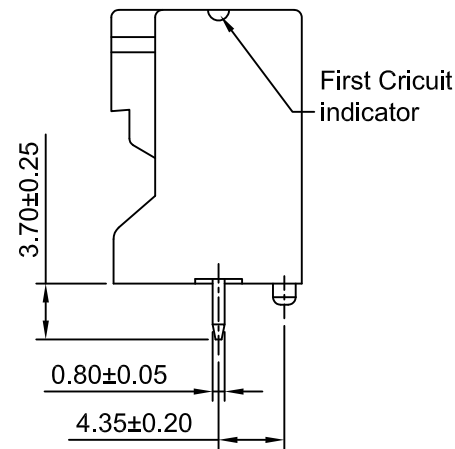

P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05

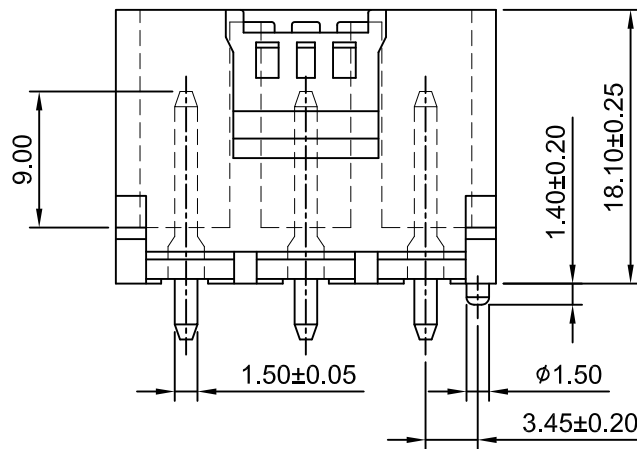

Ordering Information:

A7921WVI-N-F-XP-HCS - *** - **
1 2 3

- Part NO.
- Color & Guide Key:
(Blank): Key A (Natural)
BK: Key B (Black)
RD: Key C (Red)
- Packing:
(Blank): Bag
TR: Tray

SPECIFICATIONS:

Current Rating: 25A AC,DC(Max.)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 5mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 2500V AC/minute
Pin Material: Copper Alloy/Tin-copper plated
Housing Material: Nylon 6T,UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A7921WVI-N-F-2P-HCS	7.92	17.22
A7921WVI-N-F-3P-HCS	15.84	25.14
A7921WVI-N-F-4P-HCS	23.76	33.06
A7921WVI-N-F-5P-HCS	31.68	40.98

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	7.92mm PITCH HIGH-CURRENT CONNECTORS	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			A7921WVI-N-F-XP-HCS	
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			REV A0	
THIRD ANGLE PROJECTION				

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2021.06.23