

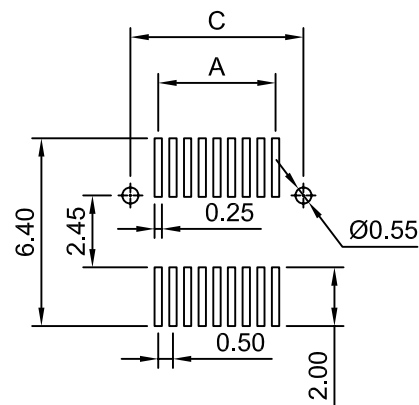

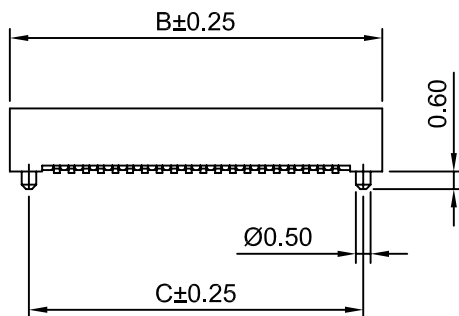


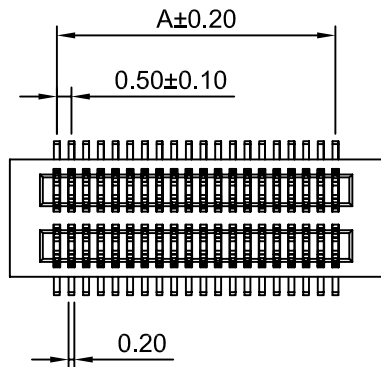

P.C.B LAYOUT



SPECIFICATIONS:

Current Rating: 0.5A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 40mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 500V AC/minute

Pin Material: Phosphor Bronze/Gold over Nickel

Material: Nylon46, UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x5P	2.00	5.20	3.90	2x19P	9.00	12.20	10.90
2x6P	2.50	5.70	4.40	2x20P	9.50	12.70	11.40
2x7P	3.00	6.20	4.90	2x21P	10.00	13.20	11.90
2x8P	3.50	6.70	5.40	2x22P	10.50	13.70	12.40
2x9P	4.00	7.20	5.90	2x23P	11.00	14.20	12.90
2x10P	4.50	7.70	6.40	2x24P	11.50	14.70	13.40
2x11P	5.00	8.20	6.90	2x25P	12.00	15.20	13.90
2x12P	5.50	8.70	7.40	2x30P	14.50	17.70	16.40
2x13P	6.00	9.20	7.90	2x35P	17.00	20.20	18.90
2x14P	6.50	9.70	8.40	2x40P	19.50	22.70	21.40
2x15P	7.00	10.20	8.90	2x45P	22.00	25.20	23.90
2x16P	7.50	10.70	9.40	2x50P	24.50	27.70	26.40
2x17P	8.00	11.20	9.90	2x60P	29.50	32.70	31.40
2x18P	8.50	11.70	10.40				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw BY:	Approved :
Tony Su	Jack Yin

General Tolerance

x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

Title :
0.5mm B To B Female

2.2mm Height

DRAW NO : B0501WVFA-S-2xXP-H220

REV
A0

A0	NEW RELEASE	2017.04.10
REV	DESCRIPTION	DATE