

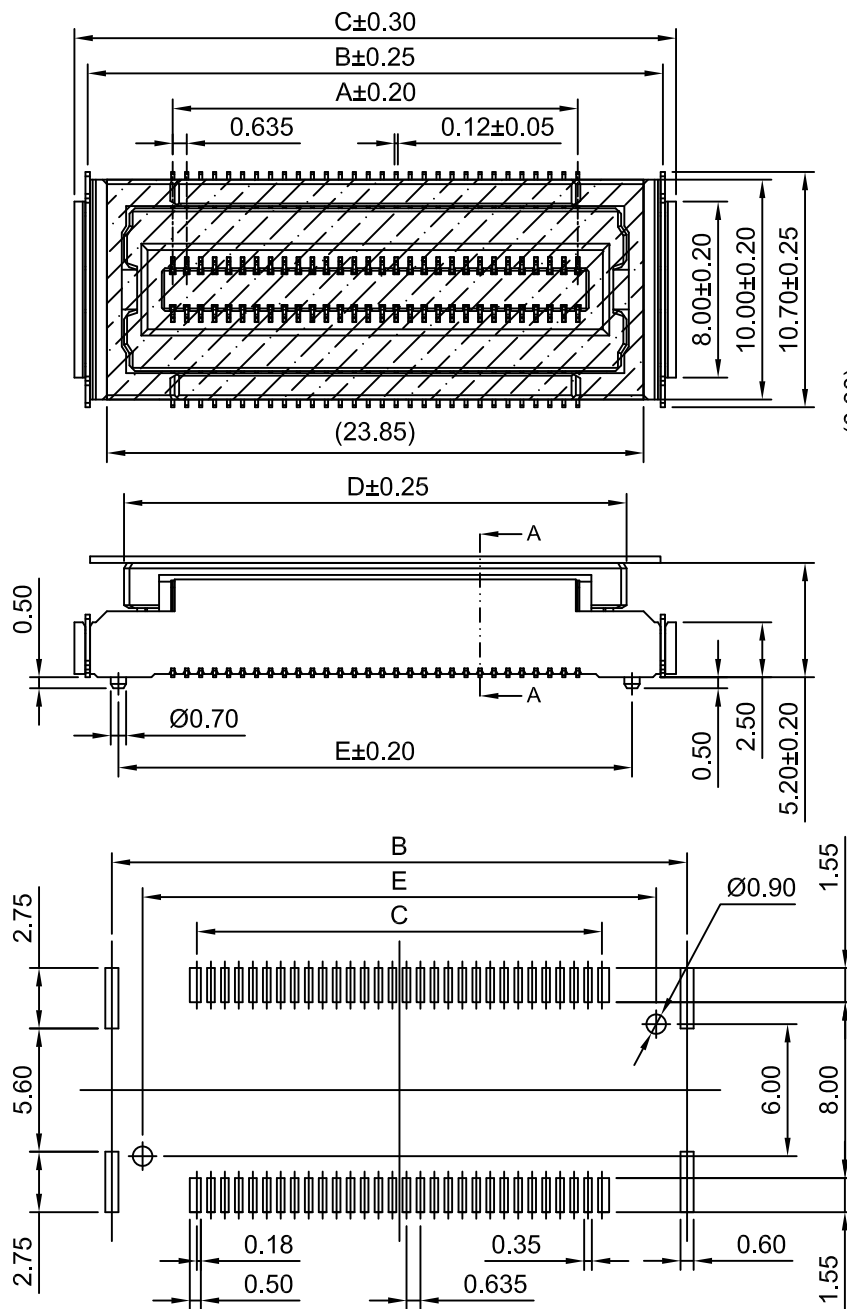
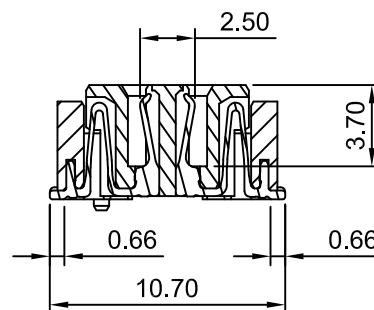


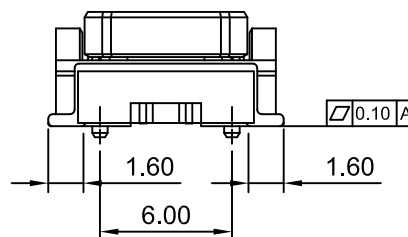



P.C.B LAYOUT
TOLERANCE: ± 0.05



SEC:C-C

a permissible mounting tolerance
on opposite direction ± 0.70

a permissible mounting tolerance
on pitch direction ± 0.70

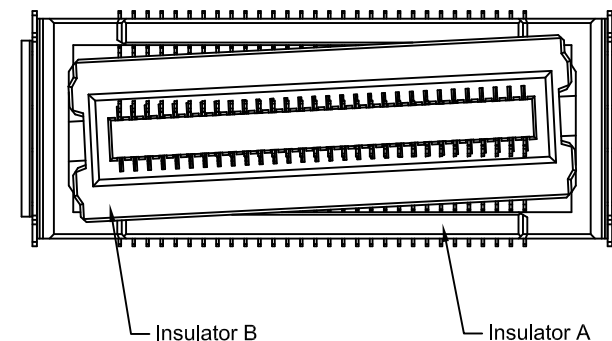

SPECIFICATIONS:

Current Rating: 0.5A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: 80m Ω Max.
Insulation Resistance: 500M Ω Min.
Withstanding Voltage: 200V AC/minute
Pin Material: Copper Alloy/Gold over Nickel
Solder tabs: Brass/Tin over Nickel
Material: LCP, UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)					
	A	B	C	D	E	F
2X30	18.415	26.15	27.35	22.85	23.35	23.85
2X40	24.765	32.50	33.70	29.20	29.70	30.20

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			TITLE		
Unit	Scale	Sheet	0.635mm PITCH BOARD TO BOARD CONNECTOR - PLUG		
mm	3:1	1 of 1			
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.	
x.xx ± 0.25 x.xxx ± 0.20 x.xxxx ± 0.15 ANGLES $\pm 1^{\circ}$				B0635HF-S-F-2xXP	
A0	NEW RELEASE	2012.12.26			REV A0
REV	DESCRIPTION	DATE			