

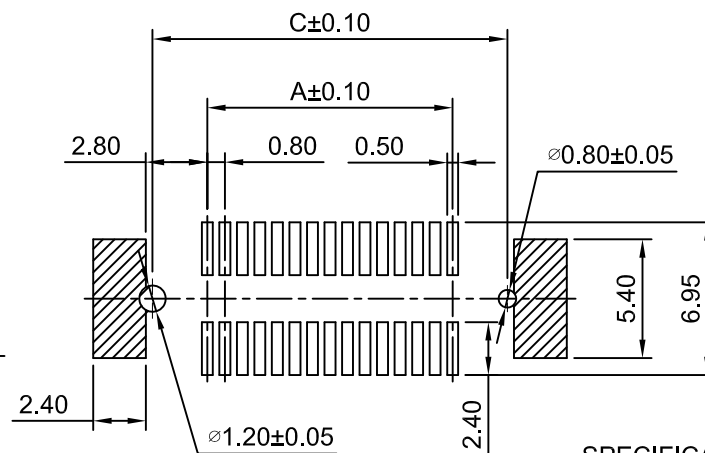
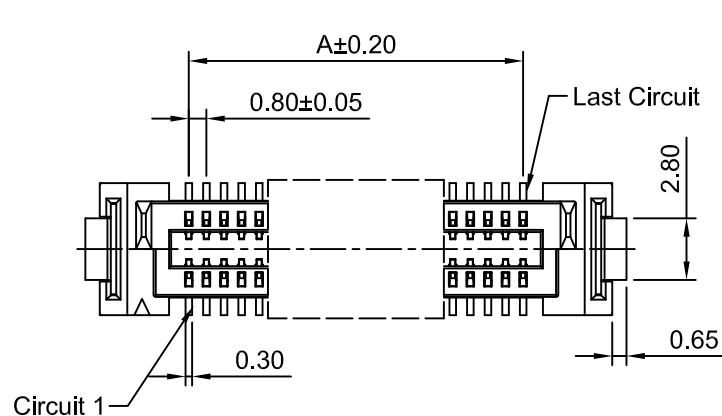


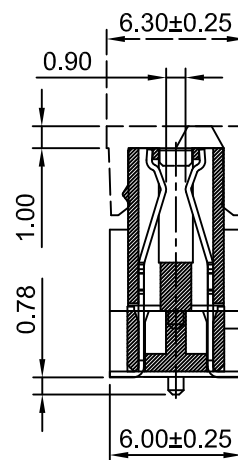

P.C.B LAYOUT

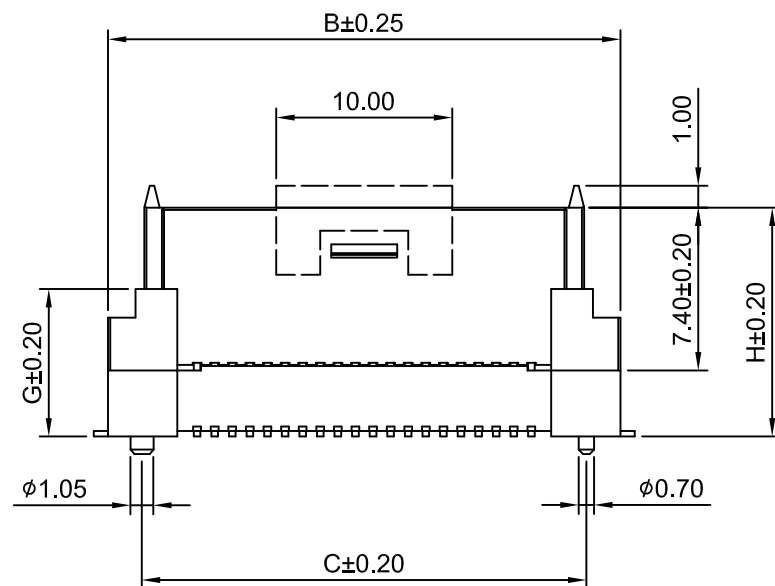

Ordering Information:

B0801WF-S-F-2xXP - **
1 2

1.Part No.

2.Size(H):

(Blank):7.40mm,G=4.00mm

H104:10.40mm,G=7.00mm

H114:11.40mm,G=8.00mm

H124:12.40mm,G=9.00mm

H134:13.40mm,G=10.00mm

SPECIFICATIONS:

Current Rating: 0.5A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 50mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 200V AC/minute

Pin Material:Phosphor Bronze/Gold over Nickel

Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x10P	7.20	15.30	12.20	2x40P	31.20	39.30	36.20
2x15P	11.20	19.30	16.20	2x50P	39.20	47.30	44.20
2x20P	15.20	23.30	20.20	2x60P	47.20	55.30	52.20
2x30P	23.20	31.30	28.20	2x80P	63.20	71.30	68.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm
Scale: 3:1
Sheet: 1 of 1

Draw By: Dianskul Wan
Approved: Jack Yin

General Tolerance

A1: ADD THE SIZE G
A0: NEW RELEASE
REV: DESCRIPTION

PROJECT
DRAW NO: B0801WF-S-F-2xXP

Title:

0.8mm BTB NPin

Female heighten DDK-Type

REV A1