

P.C.B LAYOUT



Ordering Information:

B0801WM-S-F-2xXP - **
1 / 2

1.Part No.

2.Size(H):

(Blank):8.00mm,G=6.00mm
H110:11.00mm,G=9.00mm
H120:12.00mm,G=10.00mm
H130:13.00mm,G=11.00mm
H140:14.00mm,G=12.00mm

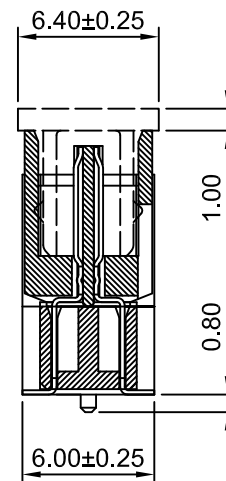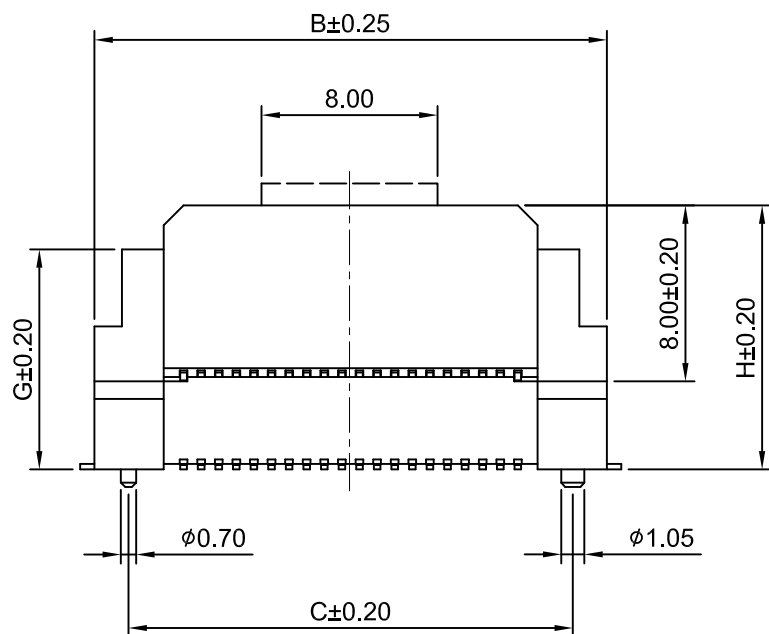

SPECIFICATIONS:

Current Rating: 0.5A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 50mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 200V AC/minute
Pin Material:Phosphor Bronze/Gold over Nickel
Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x10P	7.20	15.30	12.20	2x40P	31.20	39.30	36.20
2x15P	11.20	19.30	16.20	2x50P	39.20	47.30	44.20
2x20P	15.20	23.30	20.20	2x60P	47.20	55.30	52.20
2x30P	23.20	31.30	28.20	2x80P	63.20	71.30	68.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm, Scale: 3:1, Sheet: 1 of 1

Title:

0.8mmBTB NPin

Draw By: Dlankul Wan, Approved: Jack Yin

Male heighten DDK-Type

General Tolerance

REV	DESCRIPTION	DATE
A1	ADD THE SIZE G	2018.11.26
A0	NEW RELEASE	2016.10.18

PROJECT: x.x±0.25, x.xx±0.20, x.xxx±0.15

DRAW NO: B0801WM-S-F-2xXP

REV A1