
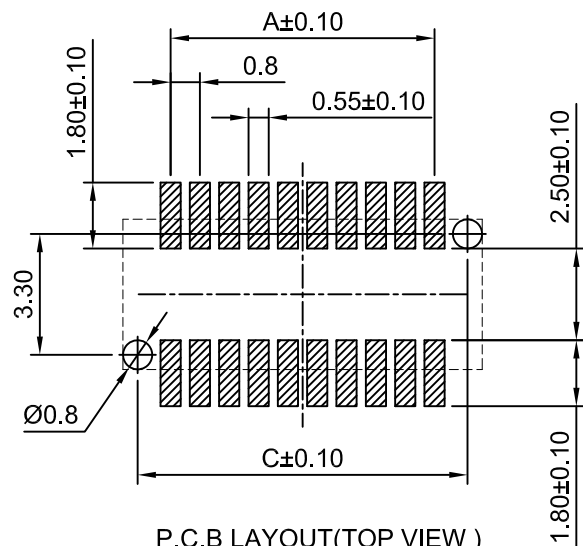
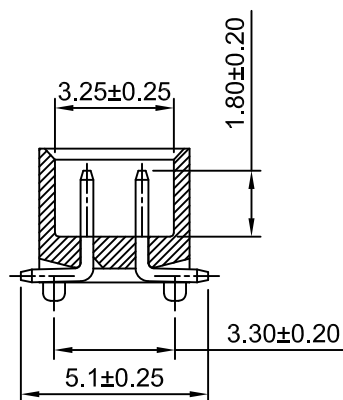
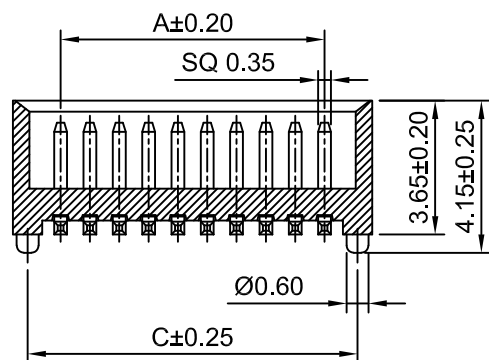


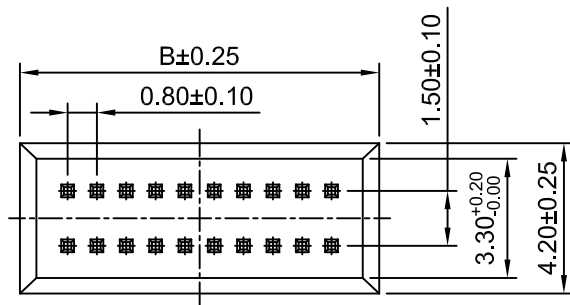

P.C.B LAYOUT(TOP VIEW)
TOLERANCE:±0.05

SPECIFICATIONS:

Current Rating:0.5A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 40mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material:Phosphor Bronze/Gold over Nickel
Material: Nylon 6T,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	B
B0801WVA-S-F-2x3P	1.60	4.20	3.40
B0801WVA-S-F-2x4P	2.40	5.00	4.20
B0801WVA-S-F-2x5P	3.20	5.80	5.00
B0801WVA-S-F-2x6P	4.00	6.60	5.80
B0801WVA-S-F-2x7P	4.80	7.40	6.60
B0801WVA-S-F-2x8P	5.60	8.20	7.40
B0801WVA-S-F-2x9P	6.40	9.00	8.20
B0801WVA-S-F-2x10P	7.20	9.80	9.00
B0801WVA-S-F-2x11P	8.00	10.60	9.80
B0801WVA-S-F-2x12P	8.80	11.40	10.60
B0801WVA-S-F-2x13P	9.60	12.20	11.40
B0801WVA-S-F-2x14P	10.40	13.00	12.20
B0801WVA-S-F-2x15P	11.20	13.80	13.00
B0801WVA-S-F-2x16P	12.00	14.60	13.80
B0801WVA-S-F-2x17P	12.80	15.40	14.60
B0801WVA-S-F-2x18P	13.60	16.20	15.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1	0.80mm PITCH VERTICAL DUAL ROW PIN HEADER - SMT TYPE	
DRAWN	CHK'D	APPR	DRAWING NO.	
Wenmin Luo	Diankui Wan	Jack Yin	B0801WVA-S-F-2xXP	
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A0	

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2021.11.29