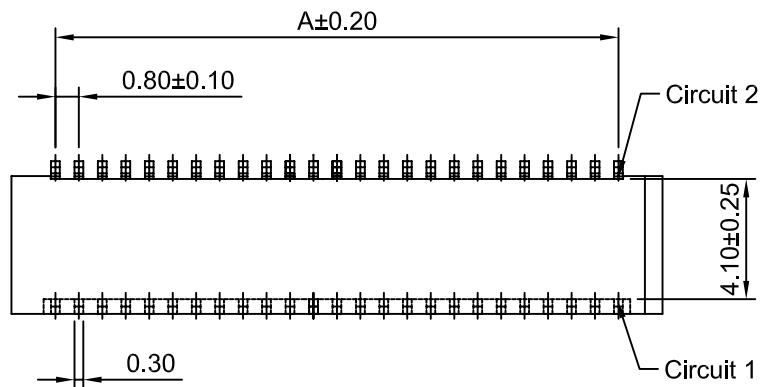


SPECIFICATIONS:

Current Rating: 0.5A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $40\text{m}\Omega$ Max

Insulation Resistance: $100\text{M}\Omega$ Min



Withstanding Voltage: 500V AC/minute

Pin Material: Phosphor Bronze/Gold over Nickel

Material: Nylon46, UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x5P	3.20	6.20	2x16P	12.00	15.00
2x6P	4.00	7.00	2x17P	12.80	15.80
2x7P	4.80	7.80	2x18P	13.60	16.60
2x8P	5.60	8.60	2x19P	14.40	17.40
2x9P	6.40	9.40	2x20P	15.20	18.20
2x10P	7.20	10.20	2x25P	19.20	22.20
2x11P	8.00	11.00	2x30P	23.20	26.20
2x12P	8.80	11.80	2x35P	27.20	30.20
2x13P	9.60	12.60	2x40P	31.20	34.20
2x14P	10.40	13.40	2x45P	35.20	38.20
2x15P	11.20	14.20	2x50P	39.20	42.20

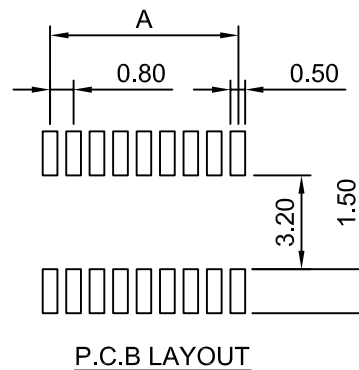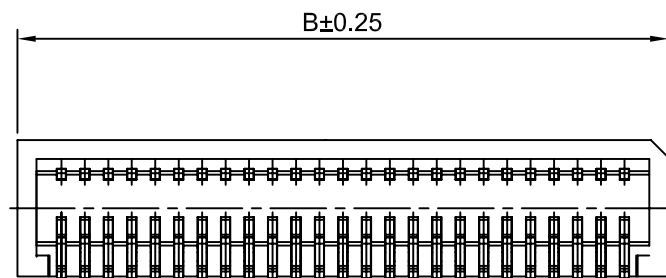

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw BY:	Approved :
Tony Su	Jack Yin

General Tolerance

x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

Title :
0.8mm B To B Plug
90° 4.70mm Height

DRAW NO : B0802WRM-S-2xXP-H470

REV
A0

A0	NEW RELEASE	2017.04.10
REV	DESCRIPTION	DATE