
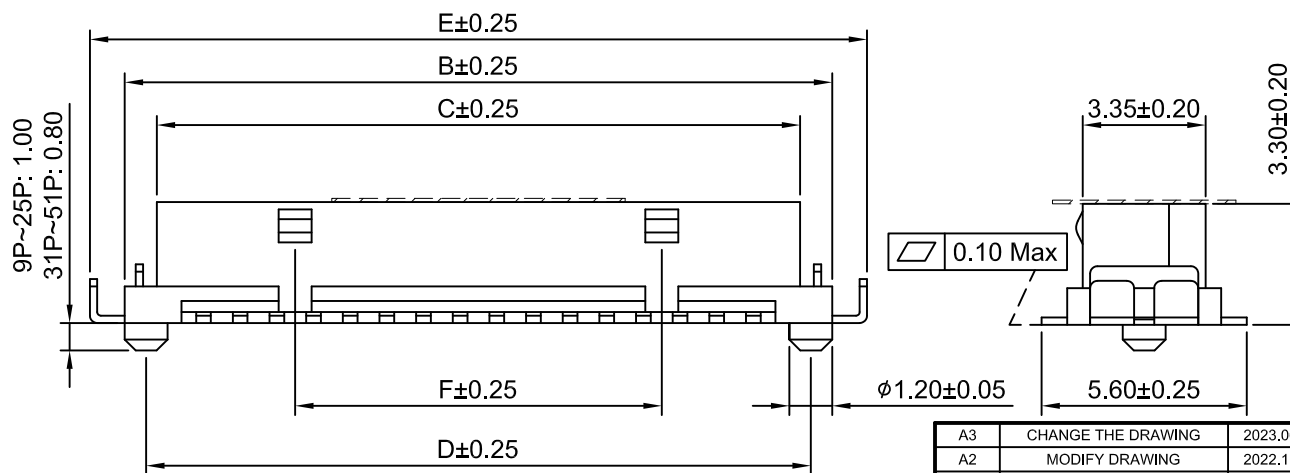
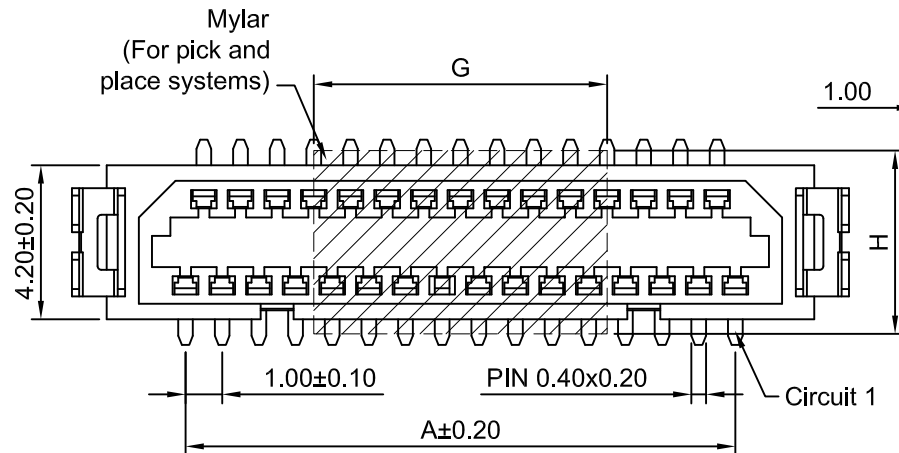
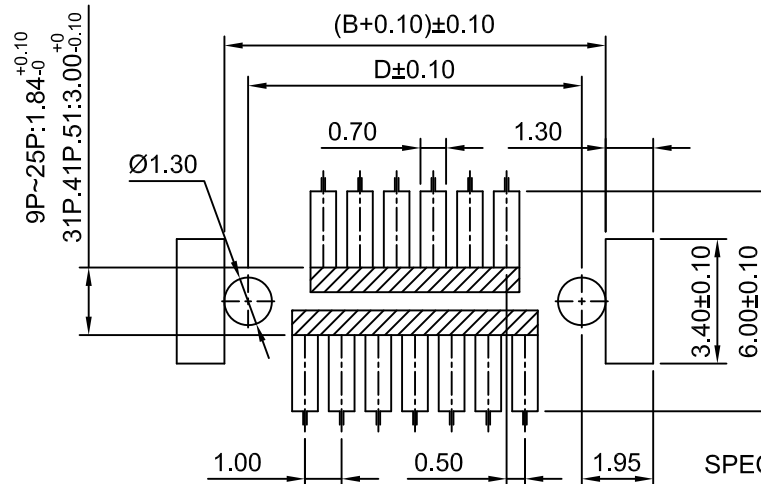


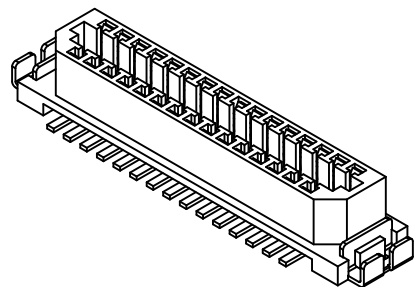

Ordering Information:
B1000H-S-F-XP-LCP - * - ***
1 2 3

- 1.Part NO.
2.Finish:
(Blank):Tin over Nickel
G:Gold over Nickel
3.Packing:
(Blank): Tube
MRE: Tape & Reel with Mylar

SPECIFICATIONS:

Current Rating: 0.5A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 50mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 250V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Material: LCP,UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)							
	A	B	C	D	E	F	G	H
9P	4.00	8.30	6.55	7.10	10.10	---	5.00	5.50
11P	5.00	9.30	7.55	8.10	11.10	---	5.00	5.50
13P	6.00	10.30	8.55	9.10	12.10	---	5.00	5.50
15P	7.00	11.30	9.55	10.10	13.10	---	5.00	5.50
17P	8.00	12.30	10.55	11.10	14.10	---	5.00	5.50
19P	9.00	13.30	11.55	12.10	15.10	---	5.00	5.50
21P	10.00	14.30	12.55	13.10	16.10	5.00	5.00	5.50
23P	11.00	15.30	13.55	14.10	17.10	6.00	5.00	5.50
25P	12.00	16.30	14.55	15.10	18.10	7.00	8.00	5.00
31P	15.00	19.30	17.55	18.10	21.10	10.00	8.00	5.00
41P	20.00	24.30	22.55	23.10	26.10	15.00	8.00	5.00
51P	25.00	29.30	27.55	28.10	31.10	20.00	8.00	5.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1	1.00mm PITCH BOARD TO BOARD CONNECT	
DRWN	CHKD	APPR	DRAWING NO.	
Chengbiao Ye	Diankui Wan	Jack Yin	B1000H-S-F-XP-LCP	
General Tolerances			THIRD ANGLE PROJECTION	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				A3

A3	CHANGE THE DRAWING	2023.06.06
A2	MODIFY DRAWING	2022.11.19
A1	ADD THE SIZE	2020.05.13
A0	NEW RELEASE	2015.05.25
REV	DESCRIPTION	DATE