




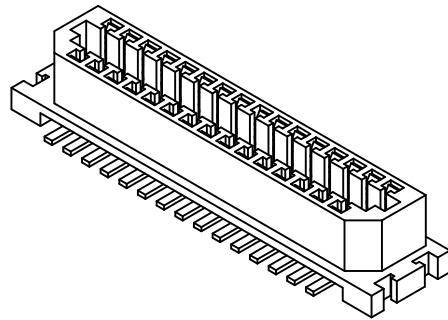


9P~25P: $1.84_{-0}^{+0.10}$
31P~41P: $51.3_{-0.10}^{+0}$

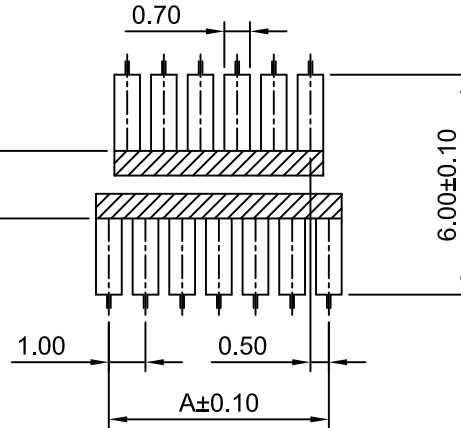


6.00±0.10

P.C.B YAYOUT
TOLERANCE:±0.05

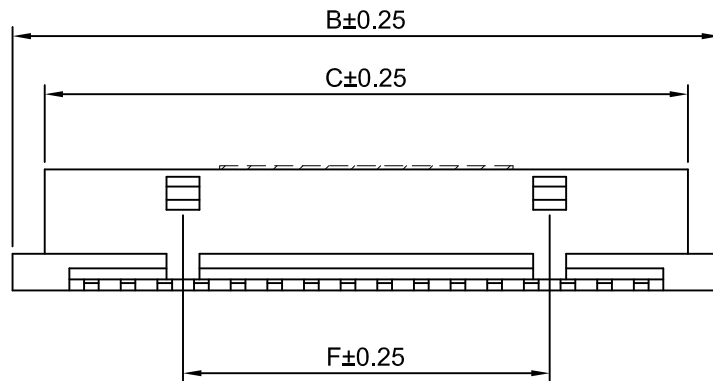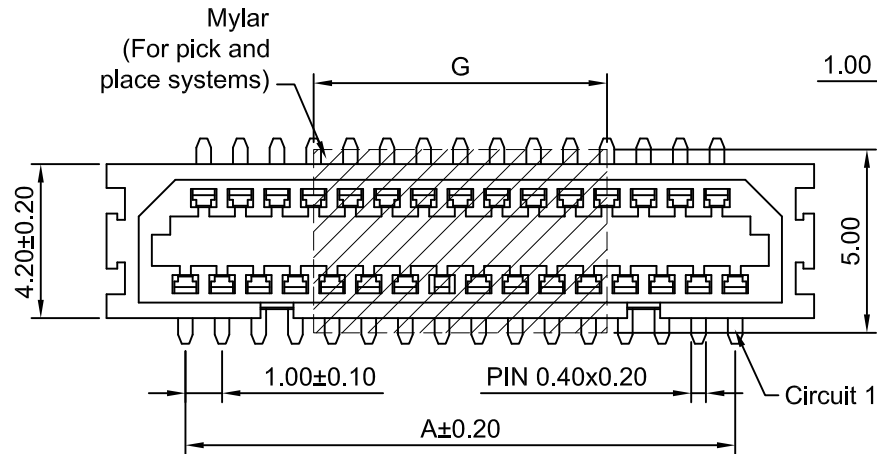

0.10 Max



Ordering Information:

B1000H-XP-LCP - $\frac{*}{2} - \frac{**}{3}$

- 1.Part NO.
- 2.Finish:
(Blank): Tin over Nickel
G: Gold over Nickel
- 3.Packing:
(Blank): Tube
MRE: Tape & Reel with Mylar

SPECIFICATIONS:

Current Rating: 0.5A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 50mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 250V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Material: LCP,UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)				
	A	B	C	F	G
B1000H-9P-LCP	4.00	8.30	6.55	---	5.50
B1000H-11P-LCP	5.00	9.30	7.55	---	5.50
B1000H-13P-LCP	6.00	10.30	8.55	---	5.50
B1000H-15P-LCP	7.00	11.30	9.55	---	5.50
B1000H-17P-LCP	8.00	12.30	10.55	---	5.50
B1000H-19P-LCP	9.00	13.30	11.55	---	5.50
B1000H-21P-LCP	10.00	14.30	12.55	5.00	5.50
B1000H-23P-LCP	11.00	15.30	13.55	6.00	5.50
B1000H-25P-LCP	12.00	16.30	14.55	7.00	8.00
B1000H-31P-LCP	15.00	19.30	17.55	10.00	8.00
B1000H-41P-LCP	20.00	24.30	22.55	15.00	8.00
B1000H-51P-LCP	25.00	29.30	27.55	20.00	8.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1	1.00mm PITCH BOARD TO BOARD CONNECT	
DRWN	CHKD	APPR	DRAWING NO.	
Dengchun Yi	Diankul Wan	Jack Yin	B1000H-XP-LCP	
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A2	

A2	MODIFY DRAWING	2022.11.19
A1	ADD THE SIZE	2020.05.13
A0	NEW RELEASE	2015.05.25
REV	DESCRIPTION	DATE