


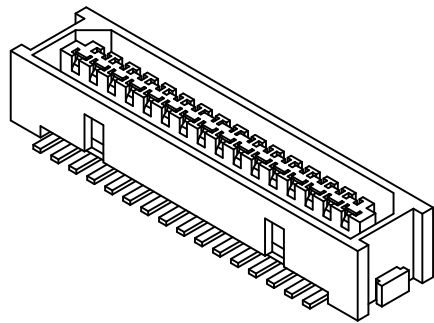


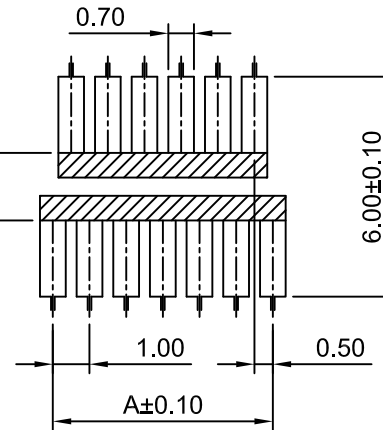


9P~25P: 1.84^{+0.10}₋₀
31P~41P: 51.30⁺⁰_{-0.10}

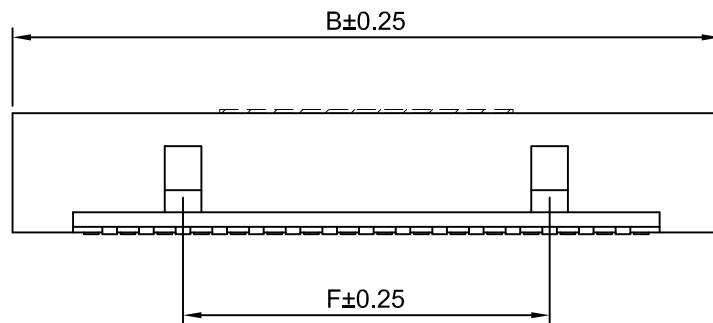

P.C.B YAYOUT
TOLERANCE: ±0.05

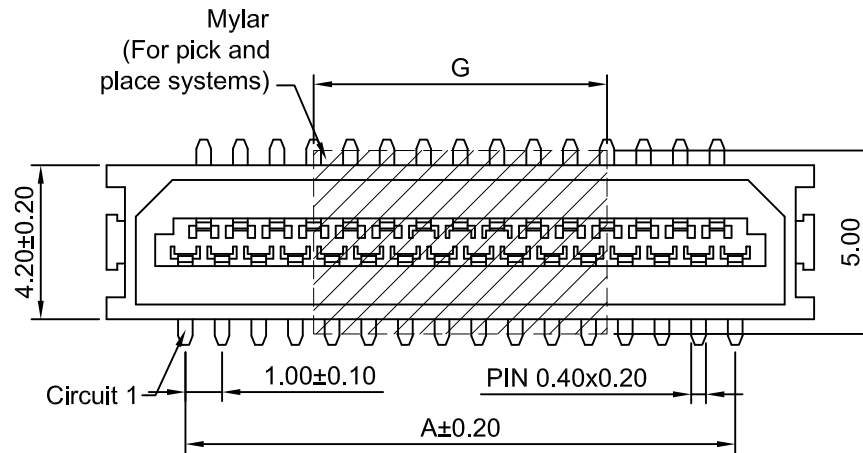

0.10 Max

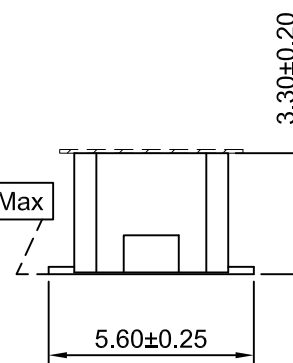

Ordering Information:

B1000HM-XP-LCP - * - **
1 2 3

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

3.Packing:

(Blank): Tube

MRE: Tape & Reel with Mylar

SPECIFICATIONS:

Current Rating: 0.5A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 50mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 250V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel

Material: LCP, UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	F	G
B1000HM-9P-LCP	4.00	8.30	---	5.50
B1000HM-11P-LCP	5.00	9.30	---	5.50
B1000HM-13P-LCP	6.00	10.30	---	5.50
B1000HM-15P-LCP	7.00	11.30	---	5.50
B1000HM-17P-LCP	8.00	12.30	---	5.50
B1000HM-19P-LCP	9.00	13.30	---	5.50
B1000HM-21P-LCP	10.00	14.30	5.00	5.50
B1000HM-23P-LCP	11.00	15.30	6.00	5.50
B1000HM-25P-LCP	12.00	16.30	7.00	8.00
B1000HM-31P-LCP	15.00	19.30	10.00	8.00
B1000HM-41P-LCP	20.00	24.30	15.00	8.00
B1000HM-51P-LCP	25.00	29.30	20.00	8.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1	1.00mm PITCH BOARD TO BOARD CONNECT	
DRWN	CHKD	APPR	DRAWING NO.	
Dengchun Yi	Dlankul Wan	Jack Yin	B1000HM-XP-LCP	
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A2	

A2	MODIFY DRAWING	2022.11.19
A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2015.05.25
REV	DESCRIPTION	DATE