
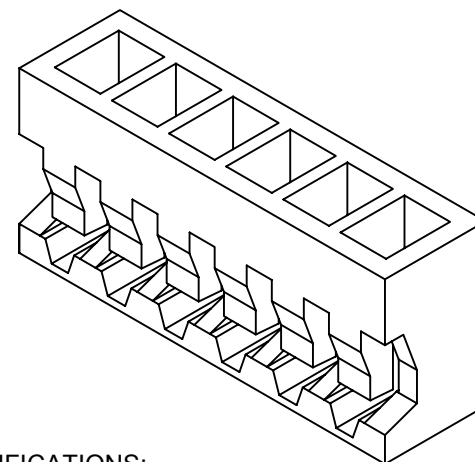
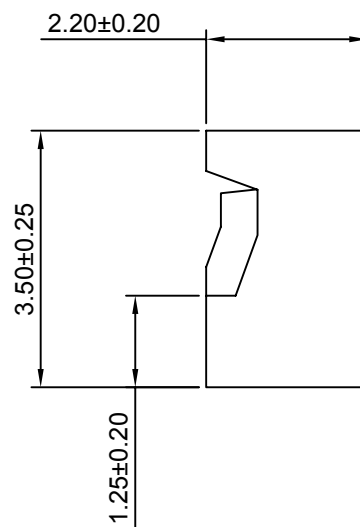
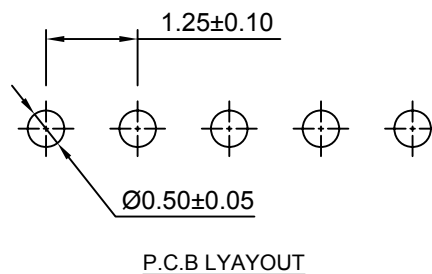
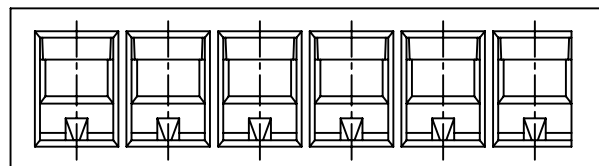
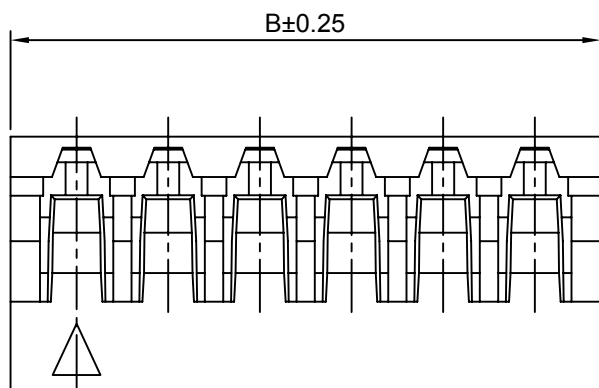


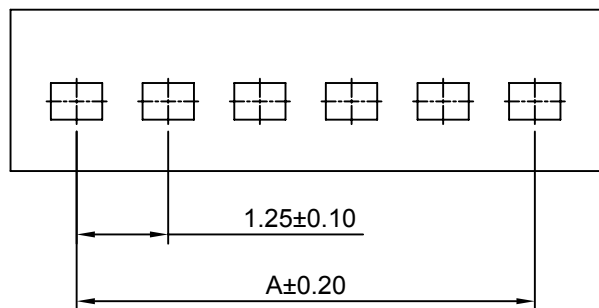

SPECIFICATIONS:
 Current Rating: 1A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 250V AC/minute
 Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	3.05	9P	10.00	11.80
3P	2.50	4.30	10P	11.25	13.05
4P	3.75	5.55	11P	12.50	14.30
5P	5.00	6.80	12P	13.75	15.55
6P	6.25	8.05	13P	15.00	16.80
7P	7.50	9.30	14P	16.25	18.05
8P	8.75	10.55	15P	17.50	19.30

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	10:1	1 of 1
Draw BY:		Approved :
Jack Yin		GONGYB

Title :		1.25mm PITCH	
		HOUSING	
DRAW NO :		B1251H-XP	REV A0

General Tolerance		
A0	NEW RELEASE	2010.03.31
REV	DESCRIPTION	DATE
		ANGLE±
		⊕