

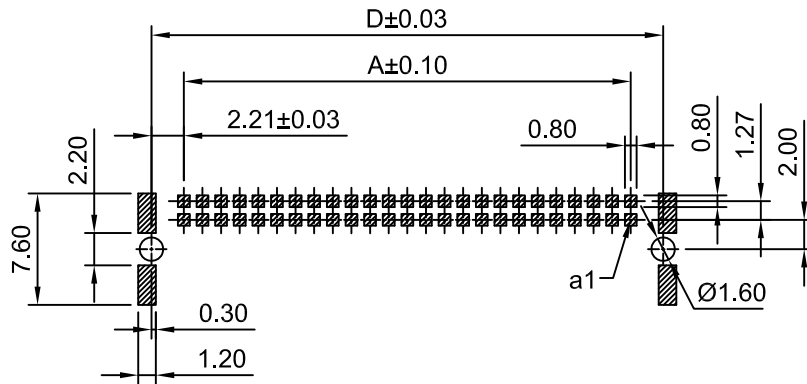
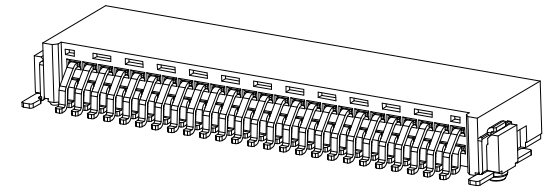

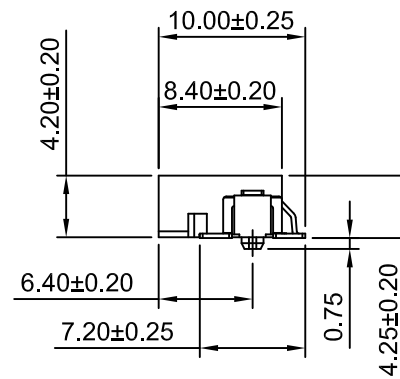


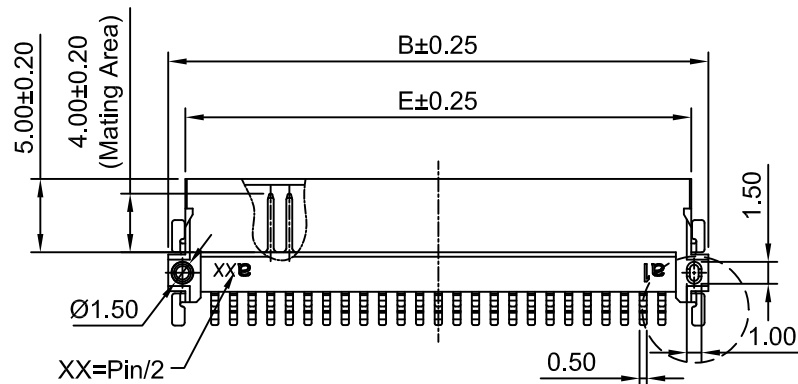

RECOMMENDED PCB LAYOUT(TOLERANCE:±0.05)

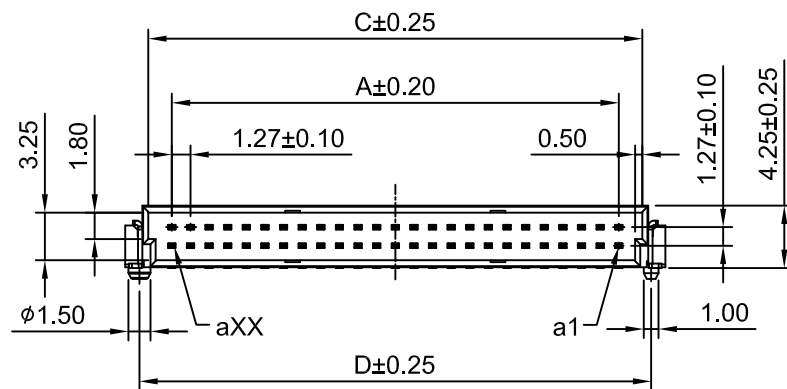

SPECIFICATIONS:

Current Rating: 0.5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -55°C ~ +125°C
Contact Resistance: 25mΩ Max.
Insulation Resistance: 10000MΩ Min.
Withstanding Voltage: 500V AC/minute
Data rate up to 3 Gbit/s
Durability: 500 Cycles.
Pin Material: Phosphor Bronze/Tin over Nickel
Mating Area: Phosphor Bronze/Gold over Nickel(Au:5u")
Solder Tabs: Phosphor Bronze/Tin over Nickel
Housing Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)				
	A	B	C	D	E
2x6P	6.35	12.70	9.57	10.77	10.37
2x8P	8.89	15.24	12.11	13.31	12.91
2x10P	11.43	17.78	14.65	15.85	15.45
2x13P	15.24	21.59	18.46	19.66	19.26
2x16P	19.05	25.40	22.27	23.47	23.07
2x20P	24.13	30.48	27.35	28.55	28.15
2x25P	30.48	36.83	33.70	34.90	34.50
2x34P	41.91	48.26	45.13	46.33	45.93
2x40P	49.53	55.88	52.75	53.95	53.55

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	Title :	
mm	2:1	1 of 1		
Draw By: Dlankul Wan		Approved : Jack YIn		1.27mm Pitch RIGHT-ANGLE DUAL ROW WAFER -SMD TYPE
General Tolerance				
x.xx±0.25 x.xx±0.20 x.xxx±0.15			PROJECT 	
DRAW NO : B1271WR-S-F-2xXP				