

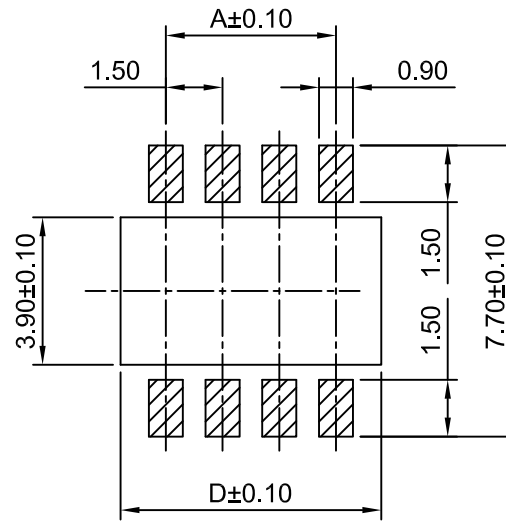


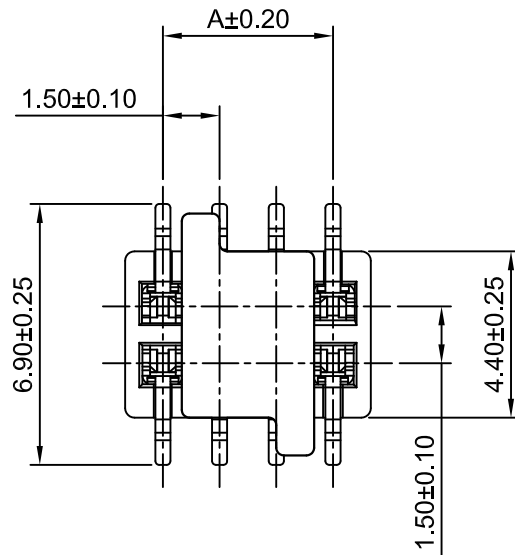

P.C.B LAYOUT
TOLERANCE:±0.05





SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Material: LCP,UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
B1501HWV-IT-S-2x2P	1.50	3.50	3.45	3.90
B1501HWV-IT-S-2x3P	3.00	5.00	4.95	5.40
B1501HWV-IT-S-2x4P	4.50	6.50	6.45	6.90
B1501HWV-IT-S-2x5P	6.00	8.00	7.95	8.40
B1501HWV-IT-S-2x6P	7.50	9.50	9.45	9.90

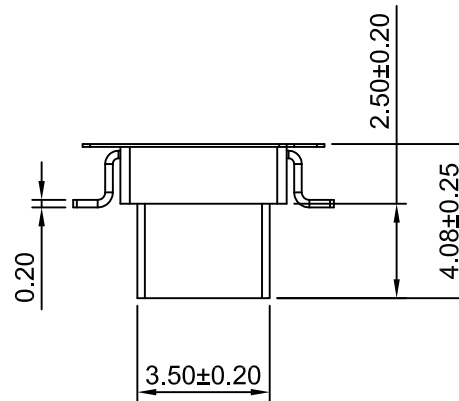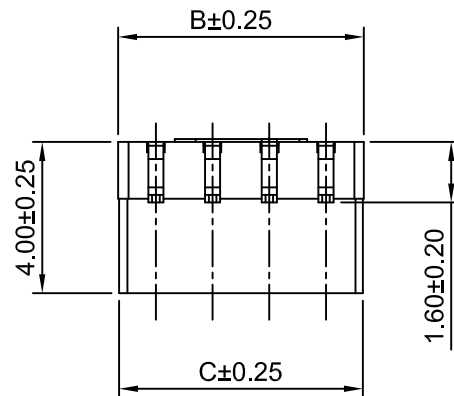

A2	CHANGE THE SIZE	2020.12.23
A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2019.06.05
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 1.50mm PITCH 180° DUAL ROW BOX HEADER -SMD TYPE
mm	5:1	1 of 1	
DRWN	CHK'D	APPR	DRAWING NO. B1501HWV-IT-S-2xXP
Dengchun Yi	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	REV A2
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			