

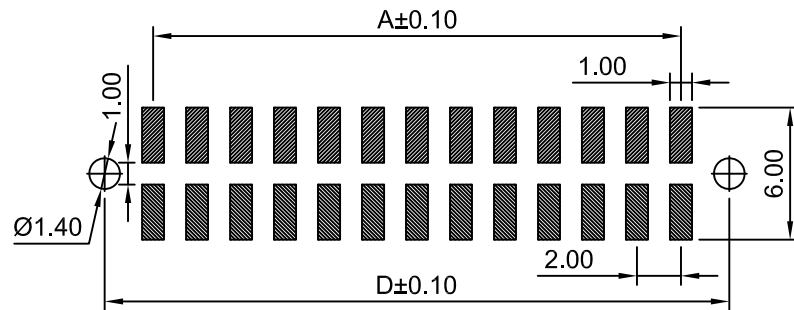
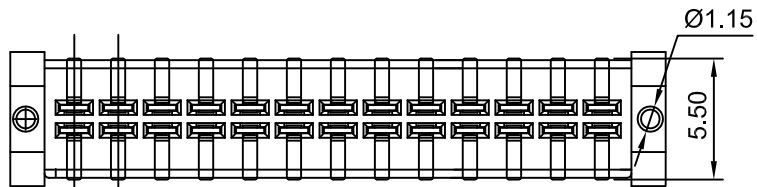
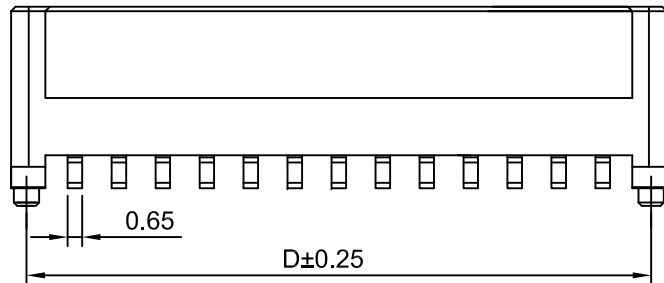
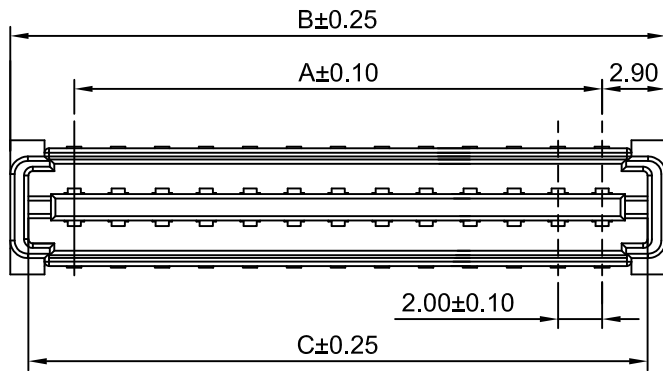


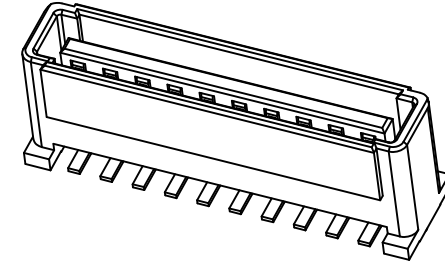

P.C.B LAYOUT
TOLERANCE:±0.05

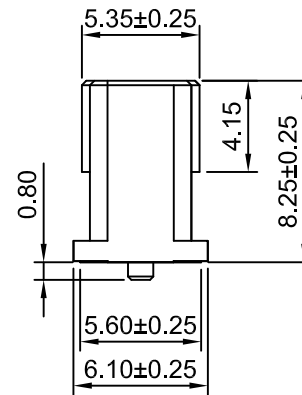

SPECIFICATIONS:

Current Rating: 0.5A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Pin Material: Copper Alloy/Gold over Nickel

Material:LCP,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
B2001WVFB-S-F-2x10P	18.00	23.90	22.10	22.40
B2001WVFB-S-F-2x11P	20.00	25.90	24.10	24.40
B2001WVFB-S-F-2x12P	22.00	27.90	26.10	26.40
B2001WVFB-S-F-2x13P	24.00	29.90	28.10	28.40
B2001WVFB-S-F-2x14P	26.00	31.90	30.10	30.40
B2001WVFB-S-F-2x15P	28.00	33.90	32.10	32.40
B2001WVFB-S-F-2x16P	30.00	35.90	34.10	34.40
B2001WVFB-S-F-2x18P	34.00	39.90	38.10	38.40
B2001WVFB-S-F-2x20P	38.00	43.90	42.10	42.40
B2001WVFB-S-F-2x25P	48.00	53.90	52.10	52.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRAWN	CHK'D	APPR	2.54mm PITCH VERTICAL SINGLE ROW WAFER -SMD TYPE	
Haisen Li	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			B2001WVFB-S-F-2xXP	A0

A0	NEW RELEASE	2023.03.22
REV	DESCRIPTION	DATE