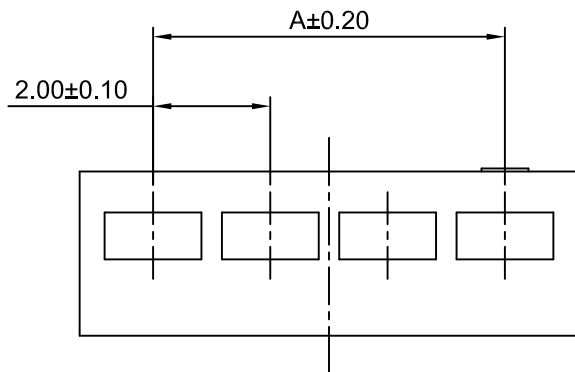
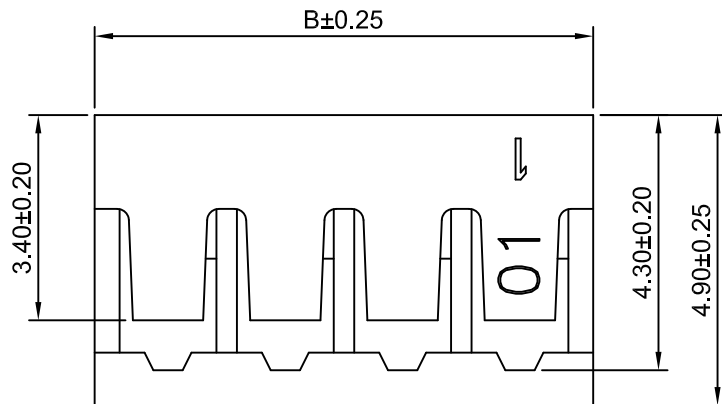
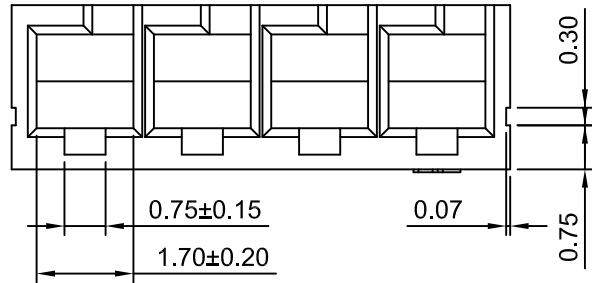


SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
B2011H-2P-AW	2.00	4.40
B2011H-3P-AW	4.00	6.40
B2011H-4P-AW	6.00	8.40
B2011H-5P-AW	8.00	10.40
B2011H-6P-AW	10.00	12.40
B2011H-7P-AW	12.00	14.40
B2011H-8P-AW	14.00	16.40
B2011H-9P-AW	16.00	18.40
B2011H-10P-AW	18.00	20.40
B2011H-11P-AW	20.00	22.40
B2011H-12P-AW	22.00	24.40
B2011H-13P-AW	24.00	26.40
B2011H-14P-AW	26.00	28.40
B2011H-15P-AW	28.00	30.40
B2011H-16P-AW	30.00	32.40
B2011H-17P-AW	32.00	34.40
B2011H-18P-AW	34.00	36.40
B2011H-19P-AW	36.00	38.40
B2011H-20P-AW	38.00	40.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	8:1	1 of 1	2.00mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Dlankut Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. B2011H-XP-AW	REV A0
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				

A0	NEW RELEASE	2021.01.16
REV	DESCRIPTION	DATE