
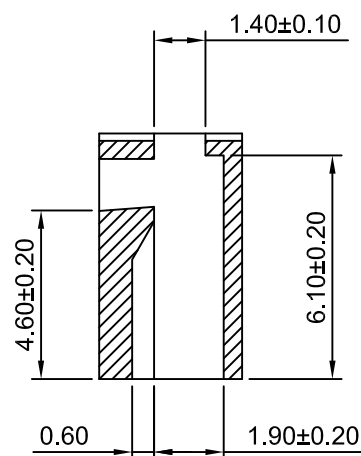
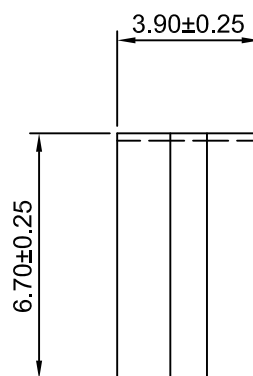
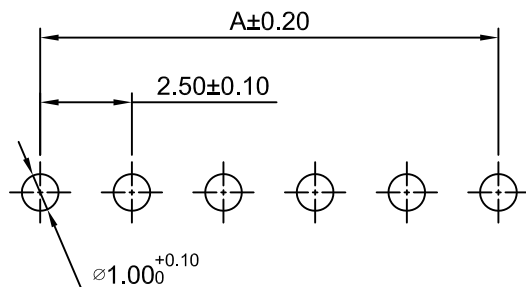
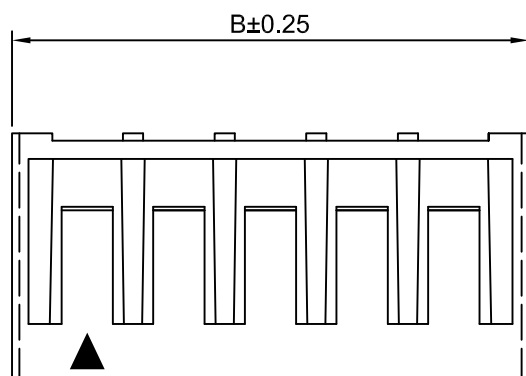


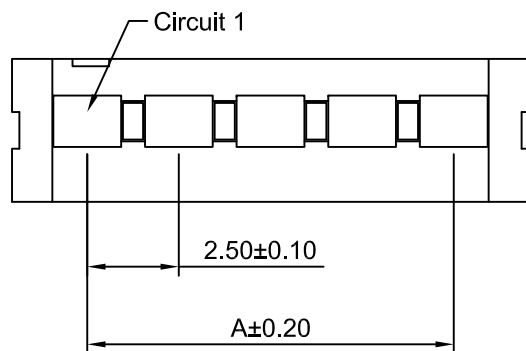

Ordering Information:


B2512H-XP - ***
1 2

1.Part No.

2.Material:

(blank) - Nylon 66,UL94V-0

GWT - Nylon 66,UL94V-0,GWT 750°C

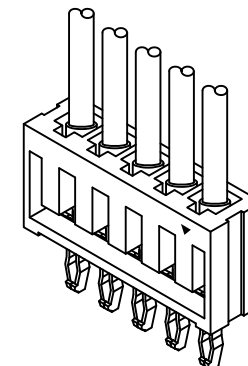

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	6.70	10P	22.50	26.70
3P	5.00	9.20	11P	25.00	29.20
4P	7.50	11.70	12P	27.50	31.70
5P	10.00	14.20	13P	30.00	34.20
6P	12.50	16.70	14P	32.50	36.70
7P	15.00	19.20	15P	35.00	39.20
8P	17.50	21.70	16P	37.50	41.70
9P	20.00	24.20			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 2.50mm Pitch Housing	
mm		5:1		1 of 1			
Draw By:		Approved :					
Dlankul Wan		Jack Yin					
General Tolerance							
x.xx±0.25		PROJECT 					
x.xx±0.20							
x.xxx±0.15							
DRAW NO :				B2512H-XP		REV A2	