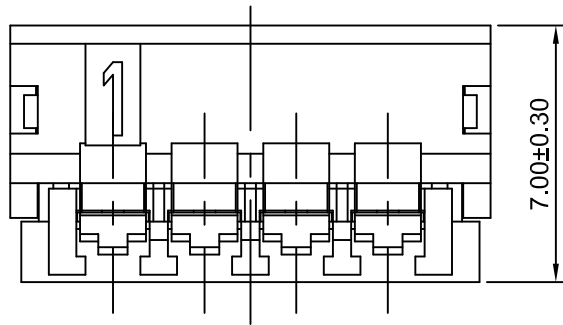


P.C.B LAYOUT

Ordering Information:

B2512WV-XP - **
1 2

1.Part No.

2.Style:

(blank):TYPE 1

2:TYPE 2

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min



Withstanding Voltage: 1000V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel


Material: PBT+15%GF,UL94V-0 (Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	8.10	10P	22.50	28.10
3P	5.00	10.60	11P	25.00	30.60
4P	7.50	13.10	12P	27.50	33.10
5P	10.00	15.60	13P	30.00	35.60
6P	12.50	18.10	14P	32.50	38.10
7P	15.00	20.60	15P	35.00	40.60
8P	17.50	23.10	16P	37.50	43.10
9P	20.00	25.60			

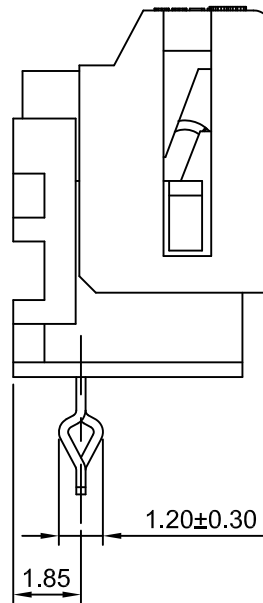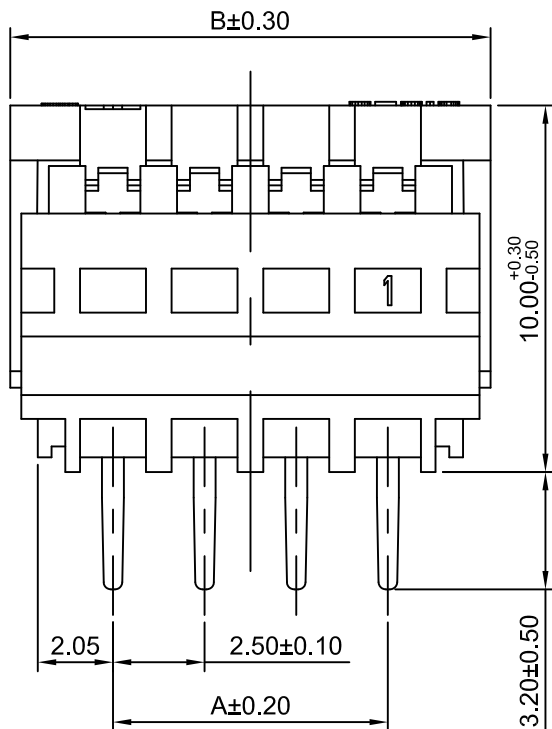

TYPE 1

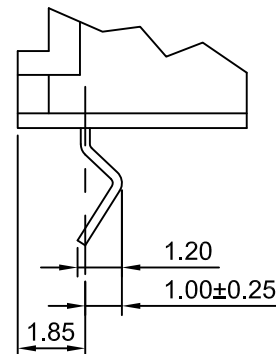

TYPE 2

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title :

2.50mm PITCH

180° WAFER

DRAW NO : B2512WV-XP

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2018.06.20

General Tolerance	
x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	