

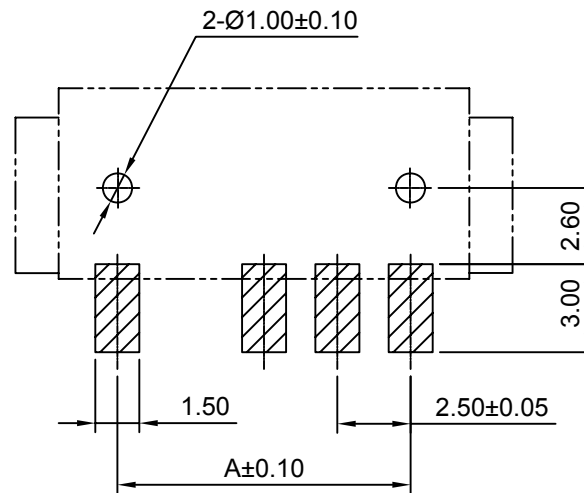
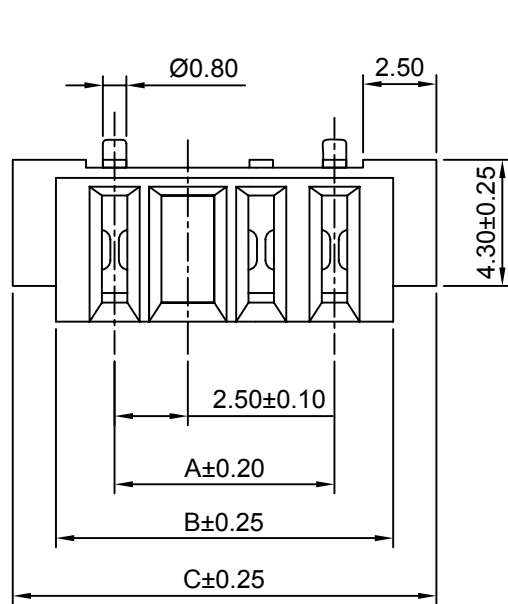


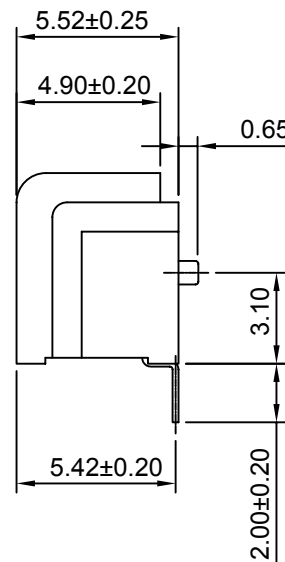

P.C.B LAYOUT

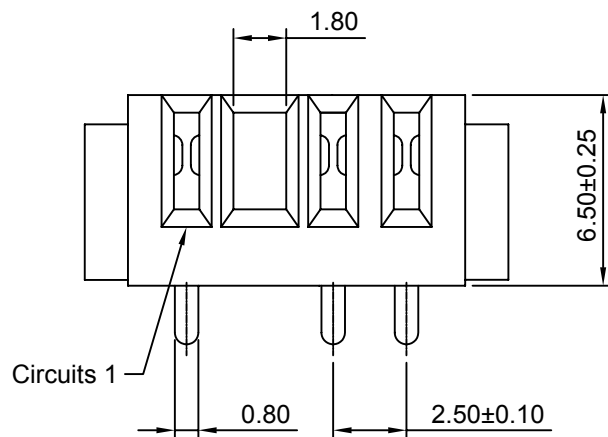

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Gold over Nickel
Material: Nylon 66,UL94V-0 (Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
3P	7.50	11.50	14.50	7P	17.50	21.50	24.45
4P	10.00	14.00	16.95	8P	20.00	24.00	26.95
5P	12.50	16.50	19.45	9P	22.50	26.50	29.45
6P	15.00	19.00	21.95	10P	25.00	29.00	31.95

CJT CONN

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm
Scale: 4:1
Sheet: 1 of 1

Draw BY: KING
Approved: GONGYB

General Tolerance

x.xx±0.25
x.xx±0.20
x.xxx±0.15



Title: 2.50mm PITCH
90° WAFER-SMT TYPE

DRAW NO: B2513WRA-S-F-XP

REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2015.05.10