
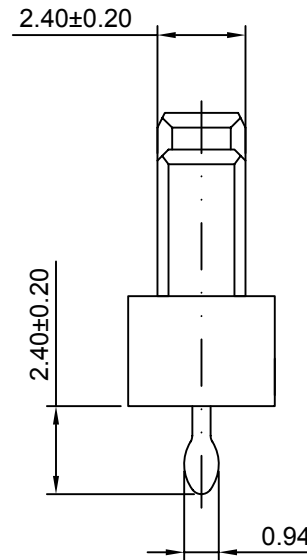
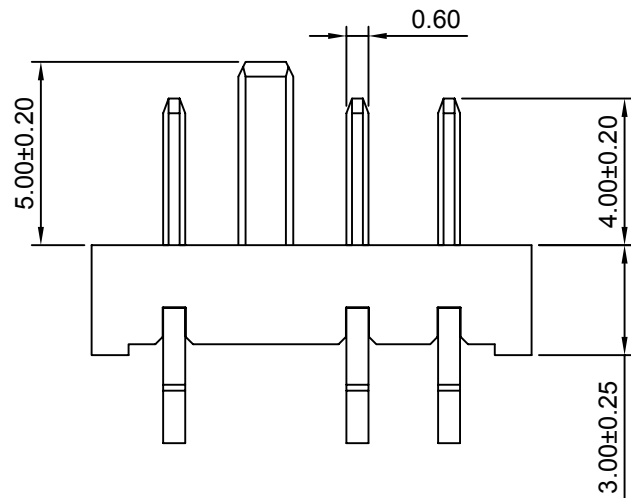



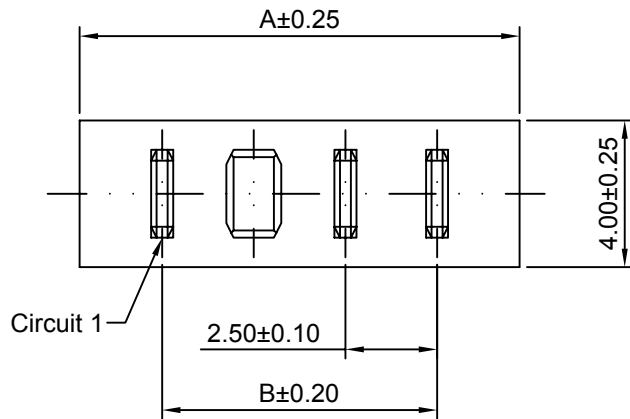

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $5\text{m}\Omega$ Max
Insulation Resistance: $1000\text{M}\Omega$ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Gold over Nickel
Material: Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	12.05	7.50	7P	22.05	17.50
4P	14.55	10.00	8P	24.55	20.00
5P	17.05	12.50	9P	27.05	22.50
6P	19.55	15.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1

Draw BY:	Approved :
KING	GONGYB

General Tolerance

x.x $\leq$ 0.25	ANGLE $\pm$
x.xx $\leq$ 0.20	
x.xxx $\leq$ 0.15	

Title :
2.50mm PITCH
180° WAFER

DRAW NO : B2513WVA-XP	REV A0
-----------------------	--------

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2015.05.10