

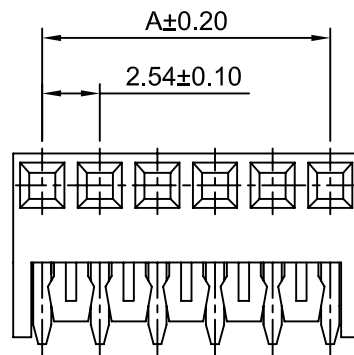
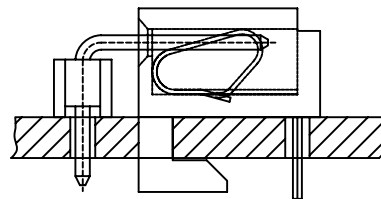
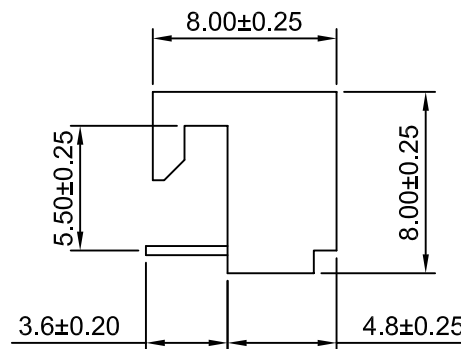


P.C.B LAYOUT

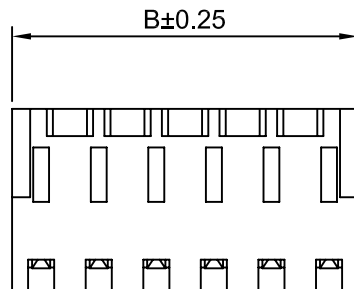

Mating Draw



SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 600V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Material: Nylon 66, UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.10	16P	38.10	40.66
3P	5.08	7.64	17P	40.64	43.20
4P	7.62	10.18	18P	43.18	45.74
5P	10.16	12.72	19P	45.72	48.28
6P	12.70	15.26	20P	48.26	50.82
7P	15.24	17.80	21P	50.80	53.36
8P	17.78	20.34	22P	53.34	55.90
9P	20.32	22.86	23P	55.88	58.44
10P	22.86	25.42	24P	58.42	60.98
11P	25.40	27.96	25P	60.96	63.52
12P	27.94	30.50	26P	63.50	66.06
13P	30.48	33.04	27P	66.04	68.60
14P	33.02	35.58	28P	68.58	71.14
15P	35.56	38.12	29P	71.12	73.68

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 2.54mm PCB Socket Right Angle Type					
mm		3:1		1 of 1							
Draw BY:				Approved :							
Tony Su				Jack Yin							
General Tolerance											
		x,x≤0.25		ANGLE± 		DRAW NO : B2541DW-XP				REV A0	
0		x.xx≤0.20									
		x.xxx≤0.15									