
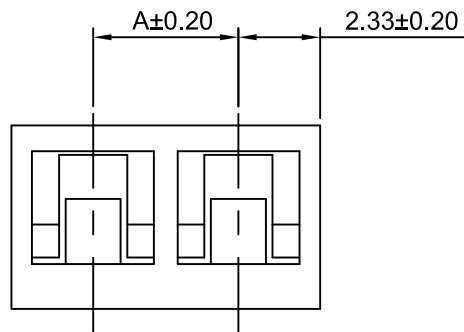
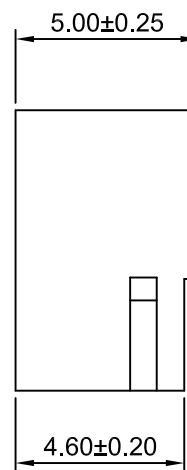
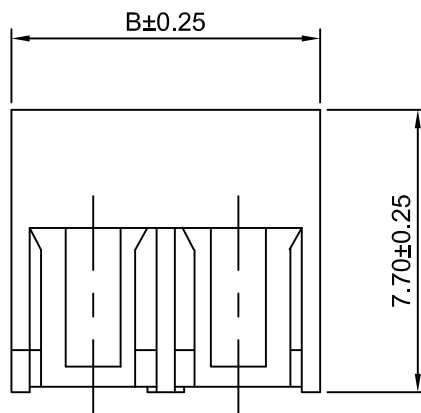


P.C.B LAYOUT

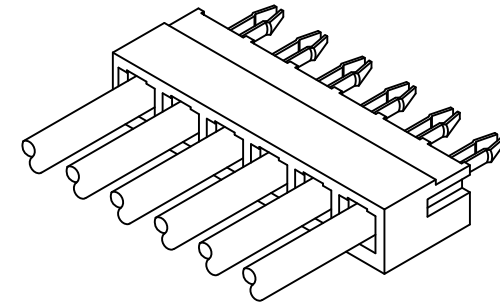

SPECIFICATIONS:

Current Rating: 7A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1500V AC/minute
Material:Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	8.62	9P	31.68	36.54
3P	7.92	12.58	10P	35.64	40.30
4P	11.88	16.54	11P	39.60	44.26
5P	15.84	20.50	12P	43.56	48.22
6P	19.80	24.46	13P	47.52	52.18
7P	23.76	28.42	14P	51.48	56.14
8P	27.72	32.38	15P	55.44	60.10

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

	Unit	Scale	Sheet	TITLE	
	mm	5:1	1 of 1		
	DRWN	CHK'D	APPR	3.96mm PITCH HOUSING	
6	Wenmin Luo	Diankui Wan	Jack Yin		
4	General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
0	x,x±0.25 x,xxx±0.20 x,xxx±0.15 ANGLES ±1°				
8				REV A3	
				B3951H-XP	

A3	CHANGE THE DRAWING	2021.03.16
A2	CHANGE THE DRAWING	2018.08.24
A1	CHANGE THE SIZE	2014.04.30
AO	NEW RELEASE	2013.11.28
REV	DESCRIPTION	DATE