

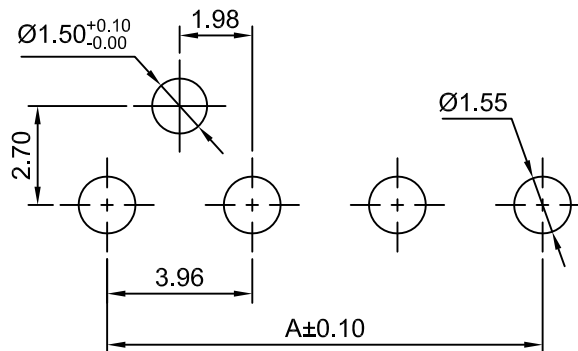
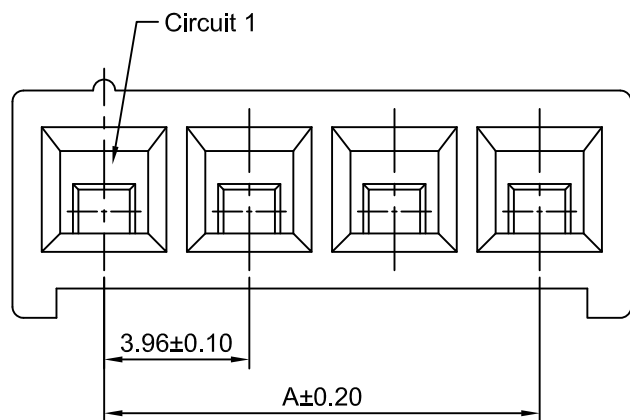
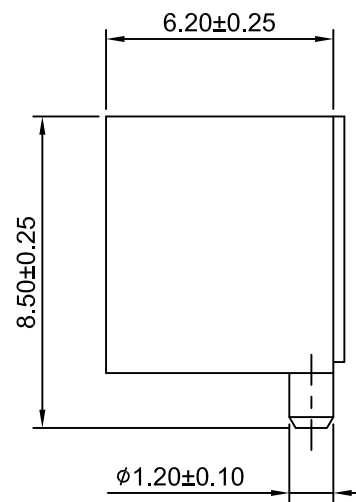


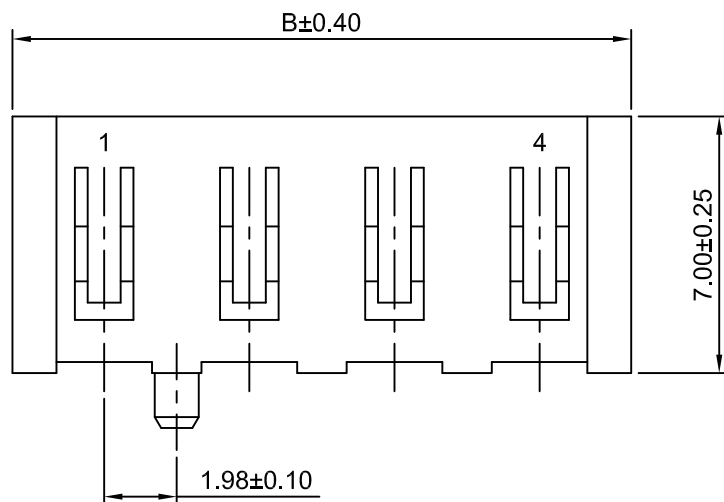

P.C.B LAYOUT
TOLERANCE:±0.05



Ordering Information:

B3952H-F-XP - ***
1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC
60335-1,5th Edition
Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
B3952H-F-2P	3.96	8.96
B3952H-F-3P	7.92	12.92
B3952H-F-4P	11.88	16.88
B3952H-F-5P	15.84	20.84
B3952H-F-6P	19.80	24.80
B3952H-F-7P	23.76	28.76
B3952H-F-8P	27.72	32.72
B3952H-F-9P	31.68	36.68
B3952H-F-10P	35.64	40.64
B3952H-F-11P	39.60	44.60
B3952H-F-12P	43.56	48.56

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
DRAWN	CHKD	APPR
Haisen Li	Djankui Wan	Jack Yin

General Tolerances
x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°

THIRD ANGLE
PROJECTION

TITLE	
3.96mm PITCH	
HOUSING	
DRAWING NO.	REV
B3952H-F-XP	A2

A2	MODIFY DRAWING	2022.07.08
A1	CHANGE THE DRAWING	2014.04.30
A0	NEW RELEASE	2013.11.28
REV	DESCRIPTION	DATE