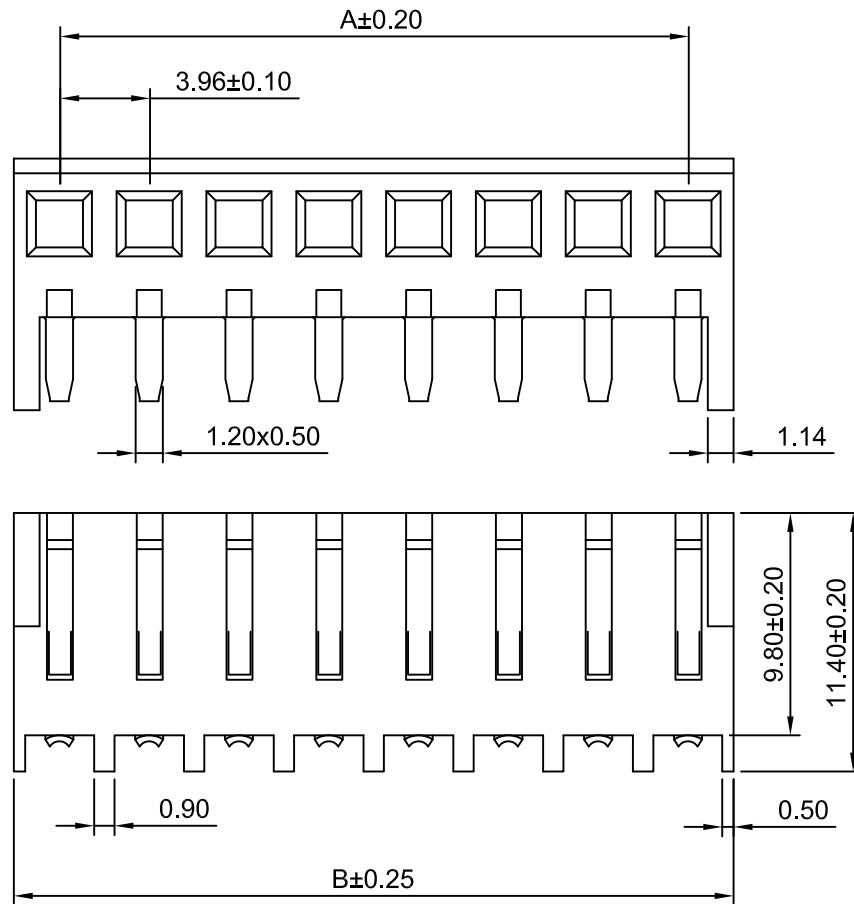


P.C.B LAYOUT

Ordering Information:

B3961AW-XP - * - **
1 2 3

1.Part No.

2.Material:

(blank) - Nylon 66,UL94V-2/White


V0 - Nylon 66,UL94V-0/White

46 - Nylon 46,UL94V-0/Natural

3.Finish:

(blank) - Tin over Nickel

G - Gold over Nickel

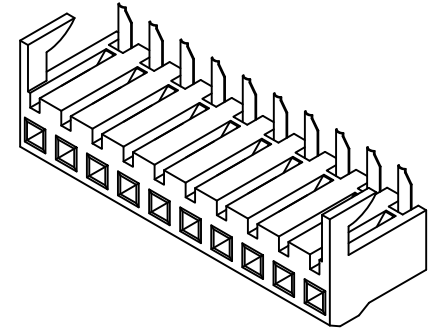

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material:Phorphos Bronze/Tin over Nickel

Material:Nylon 66,UL94V-2 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	7.98	12P	43.56	47.58
3P	7.92	11.94	13P	47.52	51.54
4P	11.88	15.90	14P	51.48	55.50
5P	15.84	19.86	15P	55.44	59.46
6P	19.80	23.82	16P	59.40	63.42
7P	23.76	27.78	17P	63.36	67.38
8P	27.72	31.74	18P	67.32	71.34
9P	31.68	35.70	19P	71.28	75.30
10P	35.64	39.66	20P	75.24	79.26
11P	39.60	43.62			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1

Draw By: Approved :

Diankui Wan Jack Yin

General Tolerance

x.x±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	

Title :

3.96mm Pitch

Bottom Entry Housing

DRAW NO : B3961AW-XP

REV A5

REV	DESCRIPTION	DATE
A5	MODIFY DRAWING	2021.09.09
A4	CHANGE THE SIZE	2019.04.12
A3	CHANGE THE INFORMATION	2019.04.04
A2	Change the drawings	2017.04.10