
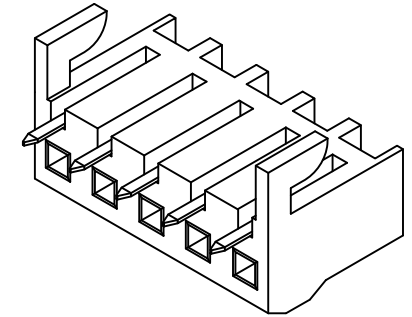


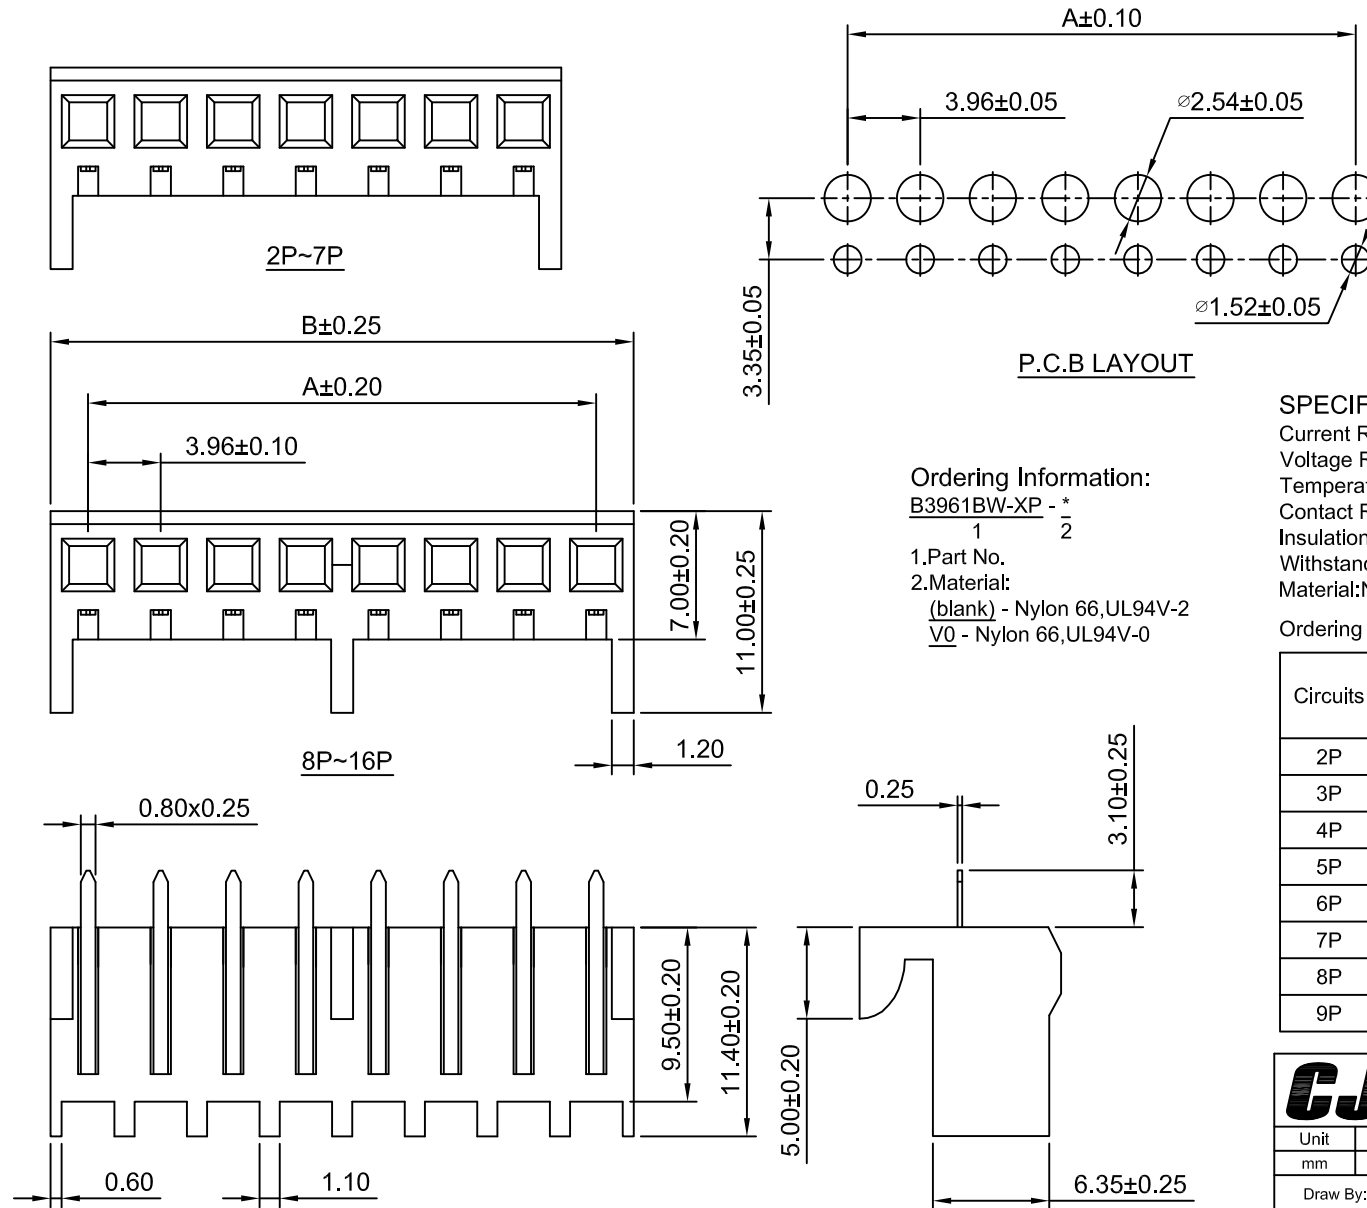

Ordering Information:

B3961BW-XP - *
1 2

1.Part No.

2.Material:

(blank) - Nylon 66,UL94V-2

V0 - Nylon 66,UL94V-0

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: 10m Ω Max.

Insulation Resistance: 1000M Ω Min.

Withstanding Voltage: 1000V AC/minute

Material:Nylon 66,UL94V-2 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	8.06	10P	35.64	39.74
3P	7.92	12.02	11P	39.60	43.70
4P	11.88	15.98	12P	43.56	47.66
5P	15.84	19.94	13P	47.52	51.62
6P	19.80	23.90	14P	51.48	55.58
7P	23.76	27.86	15P	55.44	59.54
8P	27.72	31.82	16P	59.40	63.50
9P	31.68	35.78			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale	Sheet	Title : 3.96mm Pitch	
mm		2.5:1	1 of 1		
Draw By:		Approved :		Bottom Entry Housing	
Dlankul Wan		Jack Yin			
General Tolerance					
x.x±0.25 x.xx±0.20 x.xxx±0.15		PROJECT 			
DRAW NO : B3961BW-XP				REV A3	