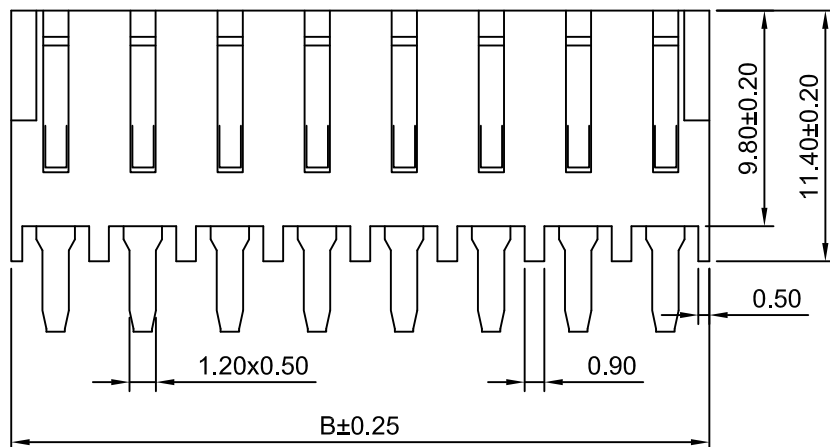
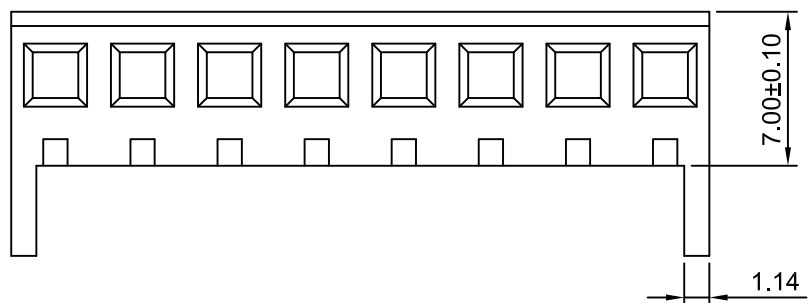


P.C.B LAYOUT

Ordering Information:

B3961CW-XP - $\frac{*}{1} - \frac{*}{2} - \frac{**}{3}$

1.Part No.

2.Material:

(blank) - Nylon 66,UL94V-2/White



V0 - Nylon 66,UL94V-0/White

46 - Nylon 46,UL94V-0/Natural

3.Finish:

(blank) - Tin over Nickel

G - Gold over Nickel

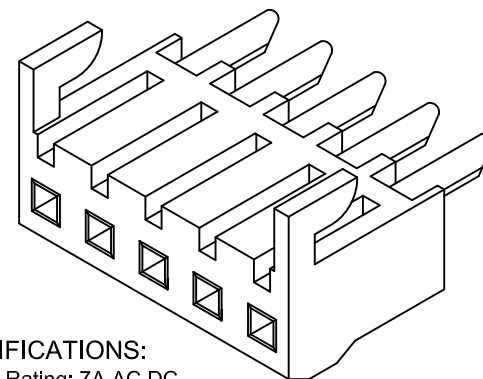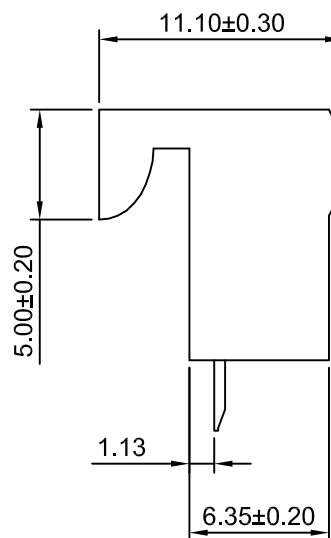

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material:Phorphos Bronze/Tin over Nickel

Material:Nylon 66,UL94V-2 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	7.98	10P	35.64	39.66
3P	7.92	11.94	11P	39.60	43.62
4P	11.88	15.90	12P	43.56	47.58
5P	15.84	19.86	13P	47.52	51.54
6P	19.80	23.82	14P	51.48	55.50
7P	23.76	27.78	15P	55.44	59.46
8P	27.72	31.74	16P	59.40	63.42
9P	31.68	35.70			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	Title : 3.96mm Pitch	
mm	3:1	1 of 1		
Draw By: Dlankul Wan		Approved : Jack Yin		Bottom Entry Housing
General Tolerance				
x.xx±0.25 x.xx±0.20 x.xxx±0.15		PROJECT 		
DRAW NO : B3961CW-XP			REV A4	