
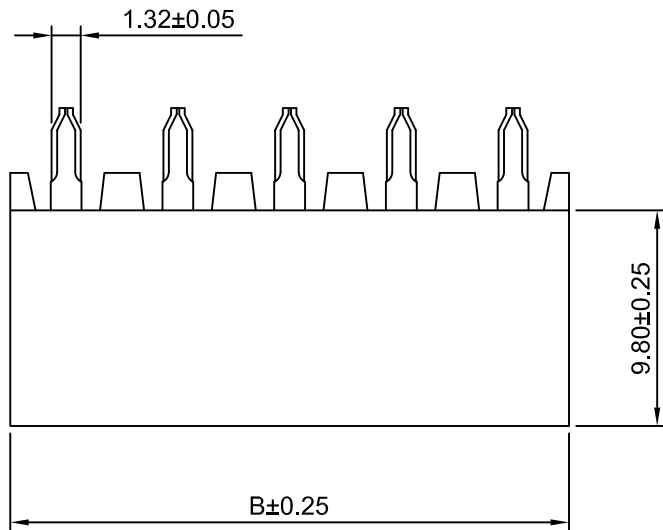
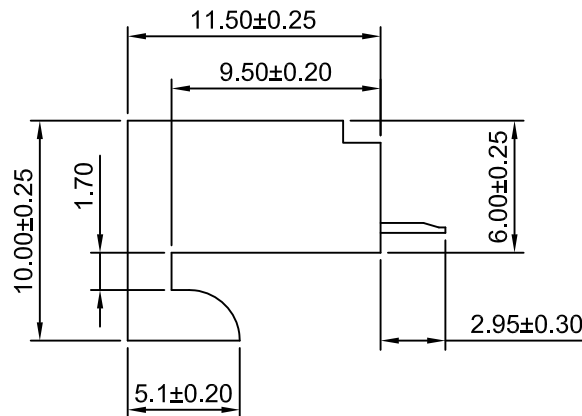


P.C.B LAYOUT
TOLERANCE:±0.05

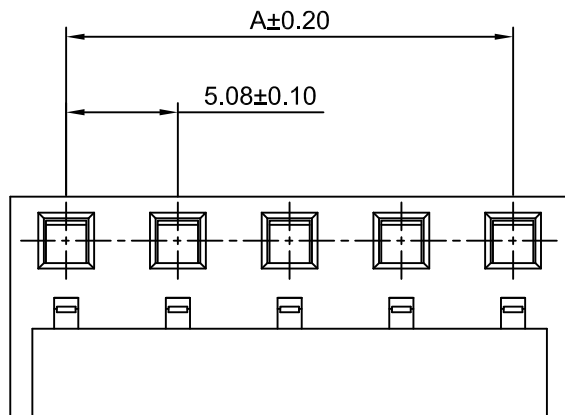

SPECIFICATIONS:

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Sn:80u" Min.,Ni:30u" Min.
Material: Nylon 66,UL94V-2(Natural)
Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
B5081CW-2P	5.08	10.16
B5081CW-3P	10.16	15.24
B5081CW-4P	15.24	20.32
B5081CW-5P	20.32	25.40
B5081CW-6P	25.40	30.48
B5081CW-7P	30.48	35.56
B5081CW-8P	35.56	40.64
B5081CW-9P	40.64	45.72
B5081CW-10P	45.72	50.80
B5081CW-11P	50.80	55.88
B5081CW-12P	55.88	60.96
B5081CW-13P	60.96	66.04
B5081CW-14P	66.04	71.12
B5081CW-15P	71.12	76.20
B5081CW-16P	76.20	81.28
B5081CW-17P	81.28	86.36
B5081CW-18P	86.36	91.44
B5081CW-19P	91.44	96.52
B5081CW-20P	96.52	101.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		3:1		1 of 1			
DRAWN		CHK'D		APPR		5.08mm PITCH	
Haisen Li		Djankui Wan		Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		180° FEMALE CONNECTOR			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
DRAWING NO.		B5081CW-XP				REV A1	

REV
A1