


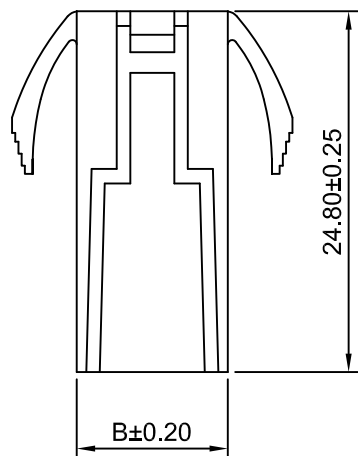

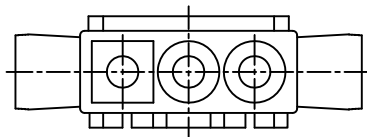


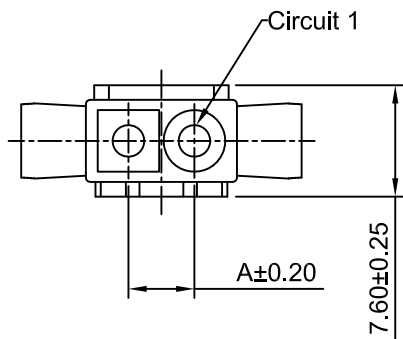

2P

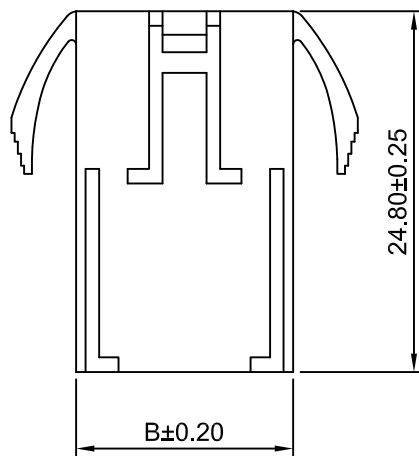

3P

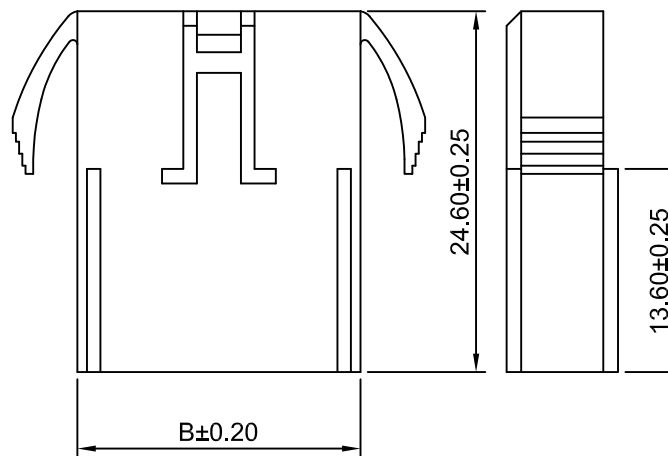

4P

Ordering Information:

C1301HM-XP - ***

1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,

IEC 60335-1,5th Edition

Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 7mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
C1301HM-2P	4.50	10.35
C1301HM-3P	9.00	14.85
C1301HM-4P	13.50	19.30

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	1.5:1	1 of 1
DRWN	CHK'D	APPR
Chengbiao Ye	Diankui Wan	Jack Yin

General Tolerances
x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°

THIRD ANGLE
PROJECTION

TITLE		
4.50mm PITCH HOUSING		
DRAWING NO.		REV
C1301HM-XP		A3

REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2023.06.08
A2	CHANGE THE DRAWING	2022.05.19
A1	CHANGE THE DRAWING	2021.11.25
A0	NEW RELEASE	2017.04.20