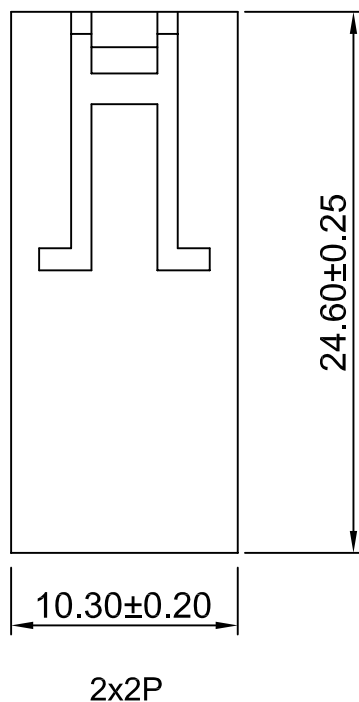
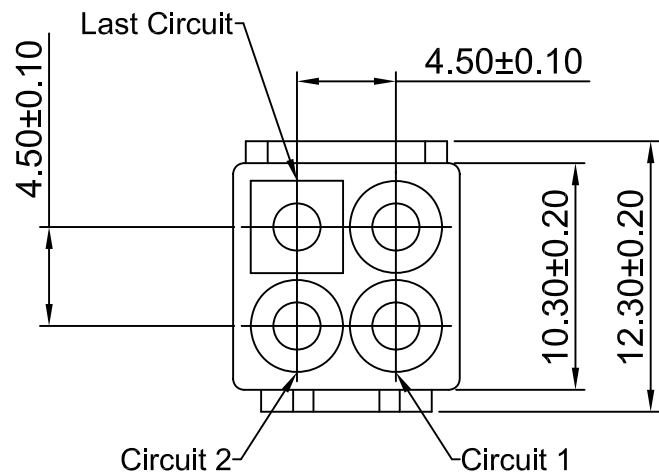


#### SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance:  $7\text{m}\Omega$  Max

Insulation Resistance:  $1000\text{M}\Omega$  Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(White)

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

| Unit     | Scale | Sheet      |
|----------|-------|------------|
| mm       | 3:1   | 1 of 1     |
| Draw BY: |       | Approved : |
| YanKing  |       | GONGYB     |

Title :  
**4.50mm Pitch**  
**Housing**

| REV | DESCRIPTION | DATE       |
|-----|-------------|------------|
| A0  | NEW RELEASE | 2015.04.09 |

| General Tolerance |             |
|-------------------|-------------|
| x.xx $\leq$ 0.25  | ANGLE $\pm$ |
| x.xx $\leq$ 0.20  |             |
| x.xxx $\leq$ 0.15 |             |

DRAW NO : **C1301HMA-2x2P** REV A0