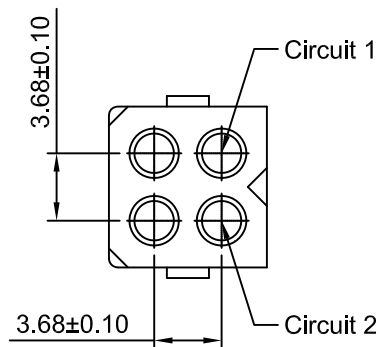


Ordering Information:

C1581HFC-2x2P - **

1 2

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-2 (Natural)

V0: Nylon 66,UL94V-0 (White)

SPECIFICATIONS:

Current Rating:5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1	3.68mm PITCH HOUSING	
DRAWN	CHK'D	APPR		
Halsen Li	Dlankul Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			C1581HFC-2x2P	A1

A1	CHANGE THE DRAWING	2021.01.30
A0	NEW RELEASE	2015.04.20
REV	DESCRIPTION	DATE