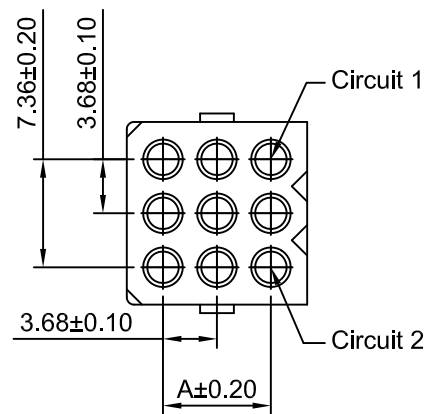
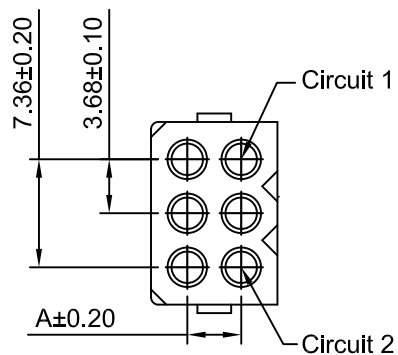


Ordering Information:

C1581HFC-3xXP - **
1 2

1.Part No.

2.Material:

(blank):UL94V-2/Natural

V0:UL94V-0/White

SPECIFICATIONS:

Current Rating:5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C1581HFC-3x2P	3.68	8.62
C1581HFC-3x3P	7.36	12.30
C1581HFC-3x4P	11.04	15.98
C1581HFC-3x5P	14.72	19.66

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	3.68mm PITCH	
DRAWN	CHK'D	APPR	HOUSING	
Haisen Li	Djankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			C1581HFC-3xXP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A0	
THIRD ANGLE PROJECTION				

A0	NEW RELEASE	2015.04.20
REV	DESCRIPTION	DATE