


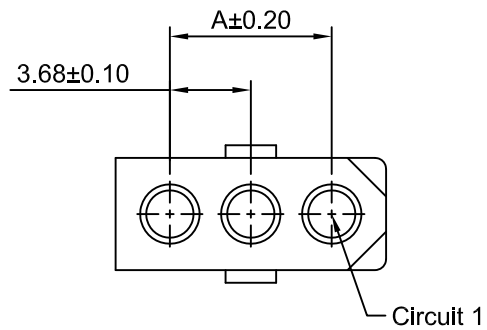

Ordering Information:



C1581HFC-XP - **
1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(White)

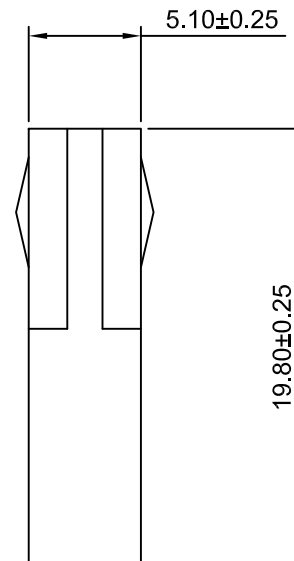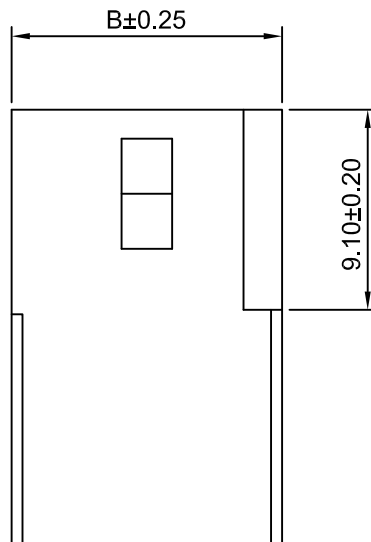

SPECIFICATIONS:

Current Rating:5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.68	8.62	4P	11.04	15.98
3P	7.36	12.30	5P	14.72	19.66

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1			
DRAWN	CHK'D	APPR	3.68mm PITCH HOUSING		
Chengbiao Ye	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C1581HFC-XP		REV A1
A1 CHANGE THE DRAWING 2023.04.26 A0 NEW RELEASE 2015.04.20 REV DESCRIPTION DATE		x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			