
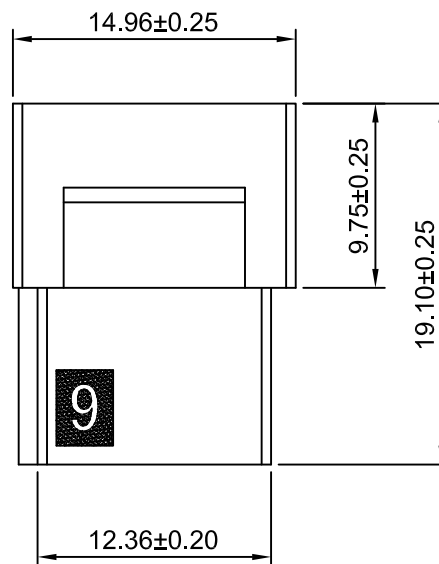
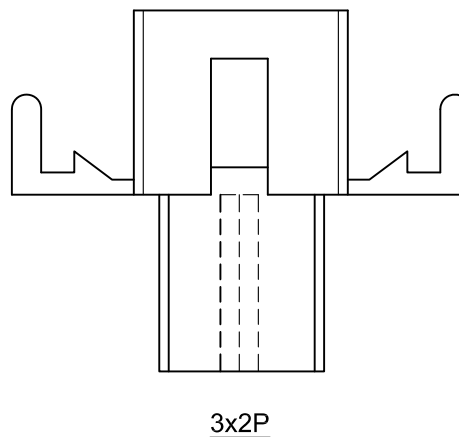
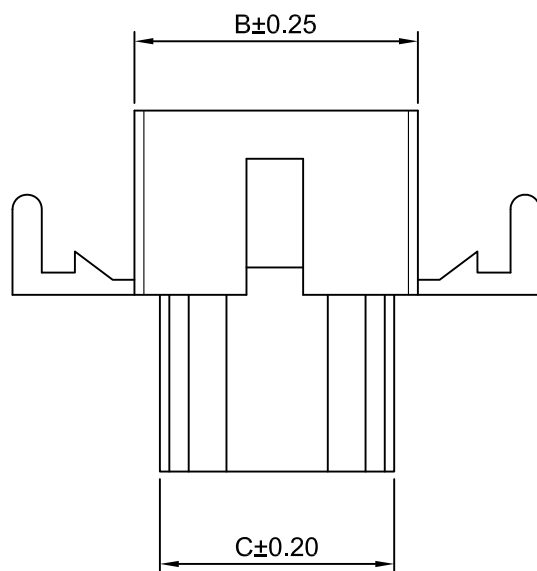


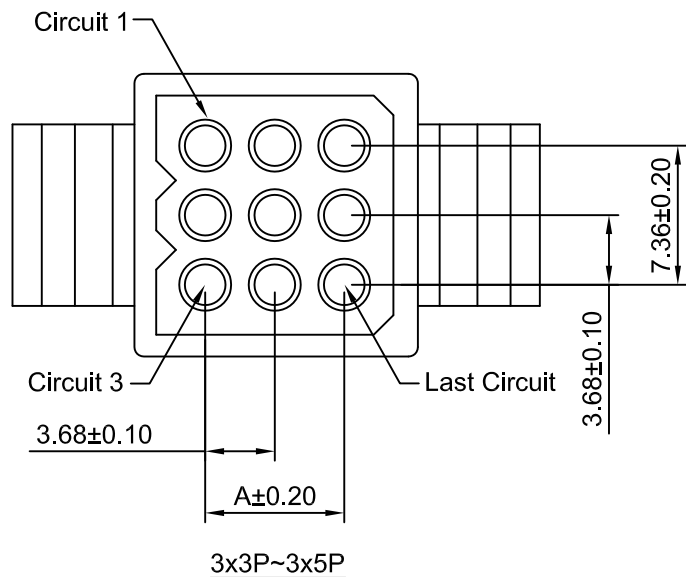

Ordering Information:


C1581HMB-3xXP - **
1 2

1.Part No.

2.Material:

(blank):UL94V-2/Natural

V0:UL94V-0/White

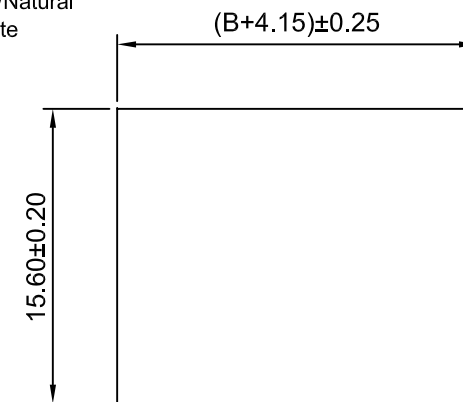

SPECIFICATIONS:

Current Rating:5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2

Panel hole layout

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
3x2P	3.68	11.32	8.72	3x4P	11.04	18.68	16.08
3x3P	7.36	15.00	12.40	3x5P	14.72	22.36	19.76

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1

Title :
3.68mm PITCH

Draw By:	Approved :
Diankui Wan	Jack Yin

HOUSING

General Tolerance	
A1	ADD THE DRAWING OF 3x2P
A0	NEW RELEASE
REV	DESCRIPTION

PROJECT	DRAW NO : C1581HMB-3xXP	REV A1
---------	-------------------------	--------