

Ordering Information:

C1581HMB-XP - **



1 2

1.Part No.


2.Material:

(blank):UL94V-2/Natural

V0:UL94V-0/White

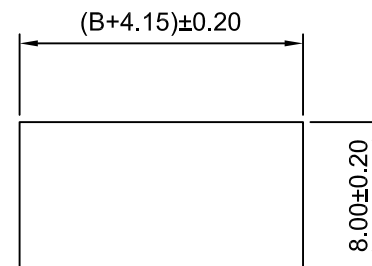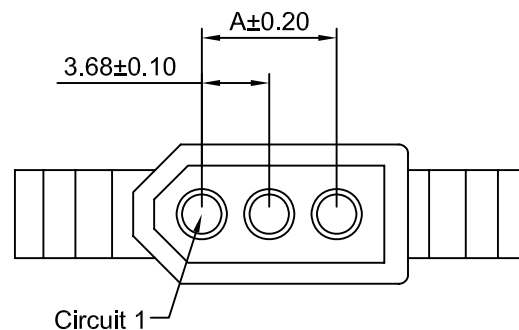

Panel hole layout

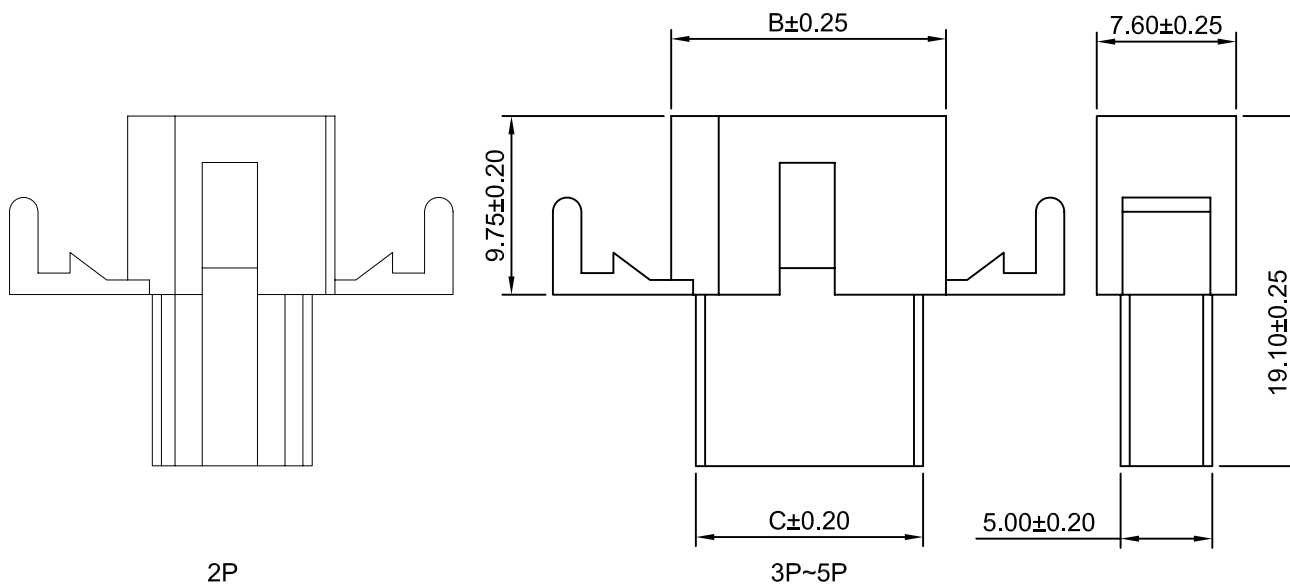

SPECIFICATIONS:

Current Rating:5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	3.68	11.32	8.72	4P	11.04	18.68	16.08
3P	7.36	15.00	12.40	5P	14.72	22.36	19.76

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title :

3.68mm PITCH

HOUSING

DRAW NO : C1581HMB-XP

REV
A1

REV	DESCRIPTION	DATE	General Tolerance	
A1	Version changes	2017.04.20	x.x±0.25	ANGLE±
A0	NEW RELEASE	2015.04.20	x.xx±0.20	
			x.xxx±0.15	