


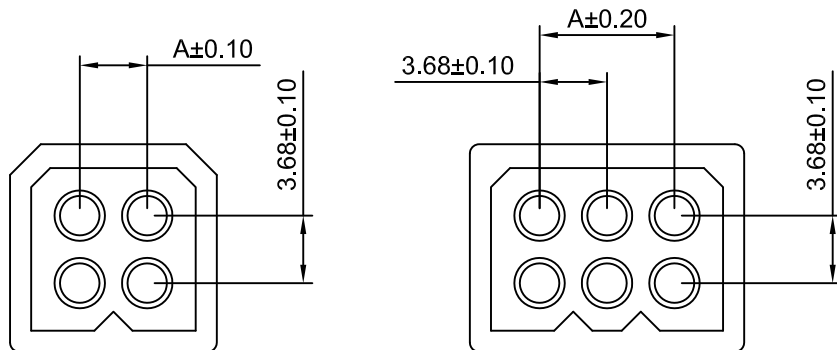

Ordering Information:

C1581HMC-2xXP - **
1 2


1.Part NO.

2.Material:


(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(White)


GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

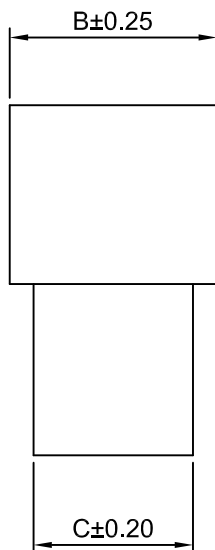

2x2P

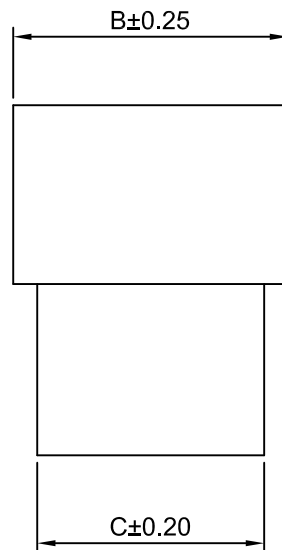

2x3P

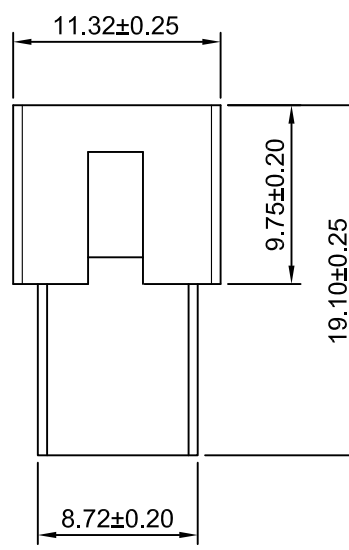

SPECIFICATIONS:

Current Rating:5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x2P	3.68	11.28	8.68	2x3P	7.36	14.96	12.36

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 3.68mm PITCH HOUSING				
mm		2.5:1		1 of 1						
DRAWN		CHK'D		APPR						
Chengbiao Ye		Diankui Wan		Jack Yin						
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. C1581HMC-2xXP			REV A1	
x,x±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°										

A1	CHANGE THE DRAWING	2023.03.18
A0	NEW RELEASE	2015.04.20
REV	DESCRIPTION	DATE