
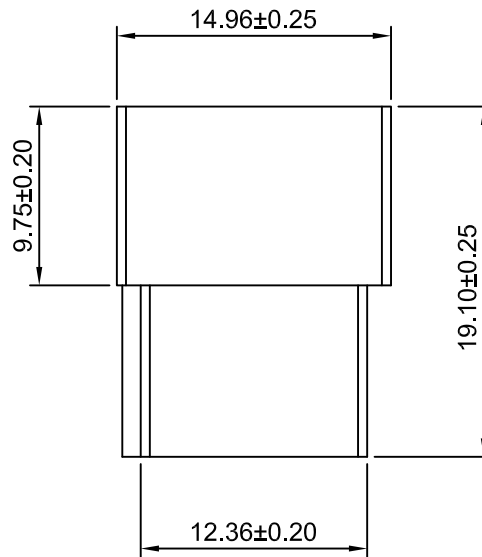
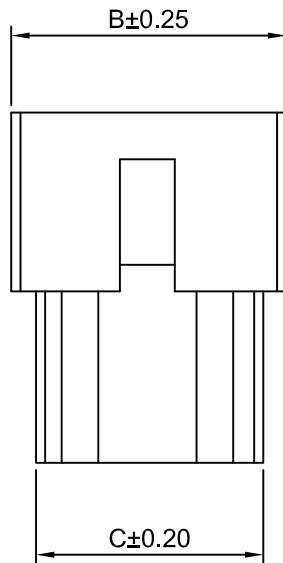


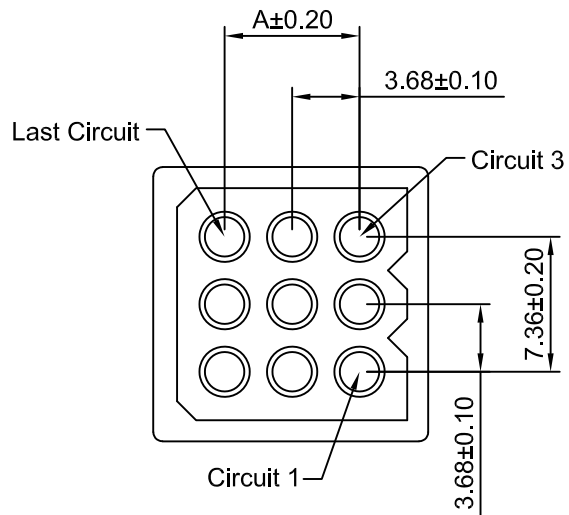

Ordering Information:

C1581HMC-3xXP - **
1 2

1.Part No.

2.Material:

(Blank):UL94V-2/Natural

V0:UL94V-0/White

SPECIFICATIONS:

Current Rating:5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
3x2P	3.68	11.32	8.72	3x4P	11.04	18.68	16.08
3x3P	7.36	15.00	12.40	3x5P	14.72	22.36	19.76

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1		
DRWN	CHK'D	APPR	3.68mm PITCH HOUSING	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO. C1581HMC-3xXP
A1	MODIFY DRAWING	2021.10.23		
A0	NEW RELEASE	2015.04.20		REV A1
REV	DESCRIPTION	DATE		