

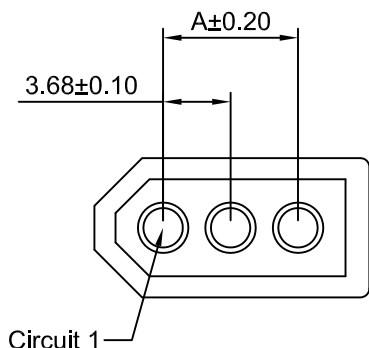
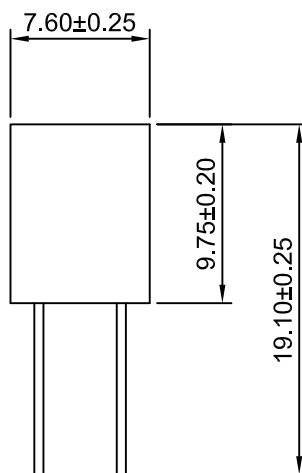
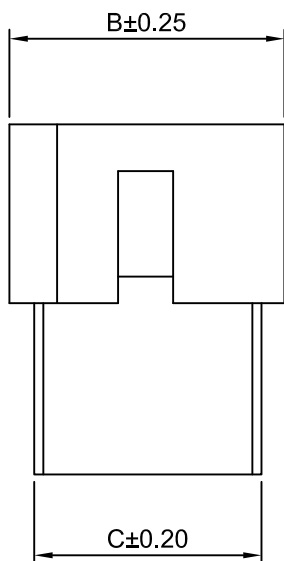


2P.5P



3P.4P

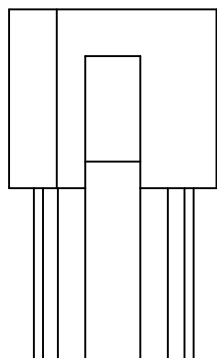

Ordering Information:

C1581HMC-XP - ***
1 2

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-2 (Natural)

V0: Nylon 66,UL94V-0 (White)

SPECIFICATIONS:

Current Rating:5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
C1581HMC-2P	3.68	11.32	8.72
C1581HMC-3P	7.36	15.00	12.40
C1581HMC-4P	11.04	18.68	16.08
C1581HMC-5P	14.72	22.36	19.76

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2.5:1	1 of 1			
DRWN	CHK'D	APPR	3.68mm PITCH HOUSING		
Dengchun Yi	Dlankul Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C1581HMC-XP		REV A1
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°					