
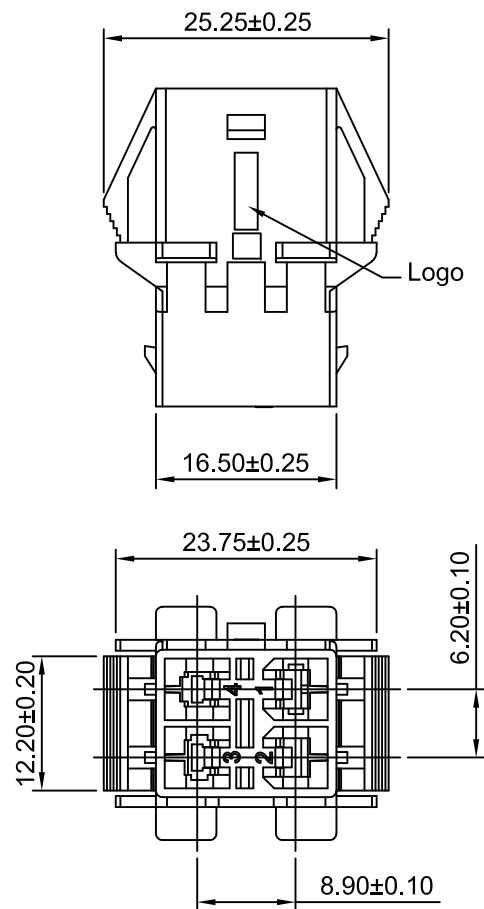





SPECIFICATIONS:

Current Rating: 15A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $10\text{m}\Omega$ Max

Insulation Resistance: $1000\text{M}\Omega$ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(Natural)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1.5:1	1 of 1	6.20mm/8.90mm PITCH	
DRWN	CHK'D	APPR	HOUSING	
Wenmin Luo	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx $\pm$ 0.25 x.xxx $\pm$ 0.20 x.xxxx $\pm$ 0.15 ANGLES $\pm 1^{\circ}$			C1801HM-2x2P	A1

A1	CHANGE THE DRAWING	2022.06.13
A0	NEW RELEASE	2021.04.01
REV	DESCRIPTION	DATE