
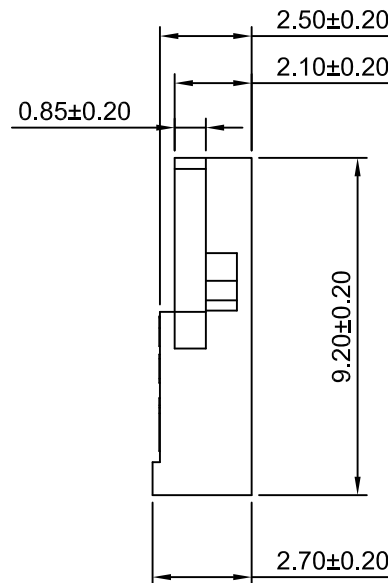
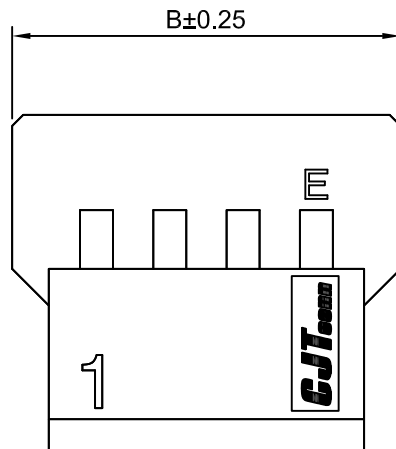


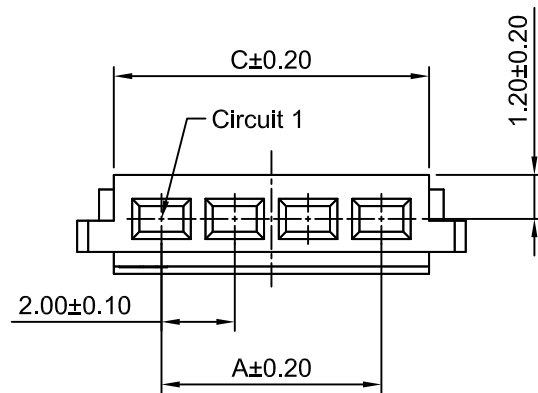

Ordering Information:

C2003HF-XP - *** - **
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): see section 2 material

BK: Black

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	6.60	4.60	9P	16.00	20.60	18.60
3P	4.00	8.60	6.60	10P	18.00	22.60	20.60
4P	6.00	10.60	8.60	11P	20.00	24.60	22.60
5P	8.00	12.60	10.60	12P	22.00	26.60	24.60
6P	10.00	14.60	12.60	13P	24.00	28.60	26.60
7P	12.00	16.60	14.60	14P	26.00	30.60	28.60
8P	14.00	18.60	16.60	15P	28.00	32.60	30.60

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	5:1	1 of 1	2.00mm Pitch Housing
DRAWN	CHK'D	APPR	
Chengbiao Ye	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x,x±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO. C2003HF-XP
			REV A1