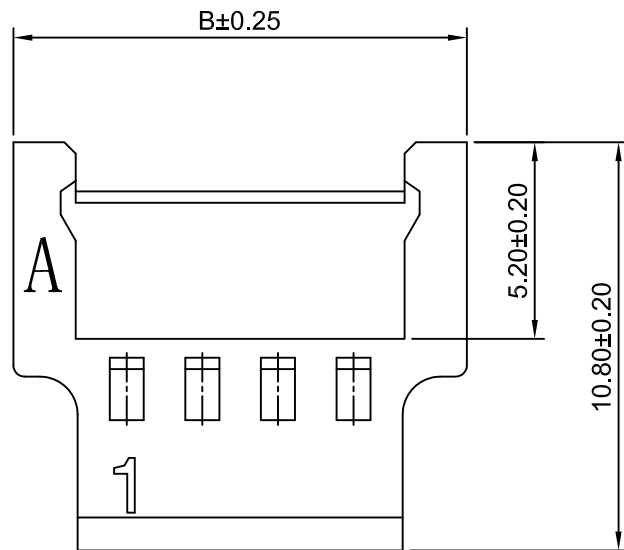
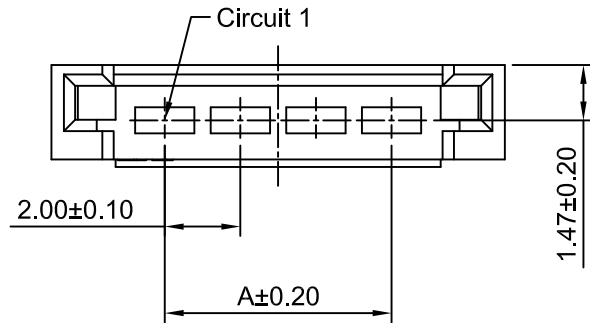


Ordering Information:

C2003HM-XP - $\frac{***}{1} - \frac{**}{2} \frac{**}{3}$

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

3.Color:

(blank):White

BK:Black

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	8.00	8P	14.00	20.00
3P	4.00	10.00	9P	16.00	22.00
4P	6.00	12.00	10P	18.00	24.00
5P	8.00	14.00	11P	20.00	26.00
6P	10.00	16.00	12P	22.00	28.00
7P	12.00	18.00	13P	24.00	30.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

General Tolerance

x.x±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	

Title : 2.00mm Pitch

Housing

DRAW NO : C2003HM-XP

REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2005.05.10