

Ordering Information:

C2003WVB-F-XP-9T - ** - *** - ***
1 2 3 4

1.Part NO.

2.Color:

(Blank): Beige
BK: Black BL: Blue
GN: Green GY: Gray
LG: Light Green RD: Red
YL: Yellow




3.Pin Finish:

(Blank): Tin over Nickel
G: Gold over Nickel
G15: Gold over Nickel(Au:15µin[0.381µm], Mating Area)
G30: Gold over Nickel(Au:30µin[0.762µm], Mating Area)

4.Void position:(see Sheet 2)

(Blank): Full positions

N*.*.*: Void position(select Arbitrary numbers)

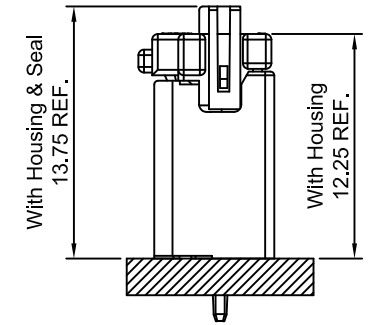


ASSEMBLY LAYOUT

SPECIFICATIONS:




Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass
Housing Material: Nylon 9T,UL94V-0

Ordering Information & Dimensions


Part NO.	Dimensions(mm)		Circuits	Press K	
	A	B		L	R
C2003WVB-F-2P	2.00	6.00	2P	---	---
C2003WVB-F-3P	4.00	8.00	3P	P1,P3	P2
C2003WVB-F-4P	6.00	10.00	4P	P1,P4	P2
C2003WVB-F-5P	8.00	12.00	5P	P1,P5	P3
C2003WVB-F-6P	10.00	14.00	6P	P2,P5	P4
C2003WVB-F-7P	12.00	16.00	7P	P2,P6	P4
C2003WVB-F-8P	14.00	18.00	8P	P2,P7	P5
C2003WVB-F-9P	16.00	20.00	9P	P2,P8	P5
C2003WVB-F-10P	18.00	22.00	10P	P2,P9	P5
C2003WVB-F-11P	20.00	24.00	11P	P2,P10	P6
C2003WVB-F-12P	22.00	26.00	12P	P2,P11	P6
C2003WVB-F-13P	24.00	28.00	13P	P2,P12	P7
C2003WVB-F-14P	26.00	30.00	14P	P2,P13	P7
C2003WVB-F-15P	28.00	32.00	15P	P2,P14	P8

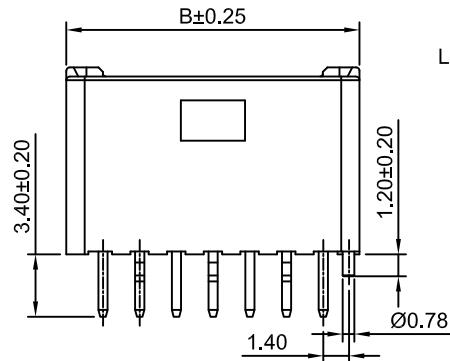


4P~7P

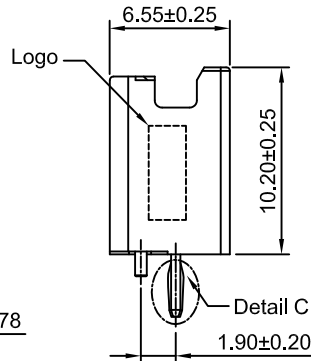


2P




3P~5P



6P~15P

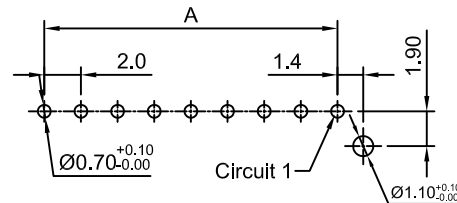

P.C.B LAYOUT
TOLERANCE:±0.05



Detail:C
Scale:2:1

A3	MODIFY DRAWING	2023.02.25
A2	MODIFY DRAWING	2023.01.31
A1	CHANGE THE DRAWING	2022.09.01
A0	NEW RELEASE	2021.07.01
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 2.00mm PITCH VERTICAL WAFER
mm	2.5:1	1 of 2	
DRAWN	CHK'D	APPR	
Chengbiao Ye	Djankui Wan	Jack Yin	
General Tolerances	THIRD ANGLE PROJECTION		DRAWING NO. C2003WVB-F-XP-9T
x,x±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°			
			REV A3