


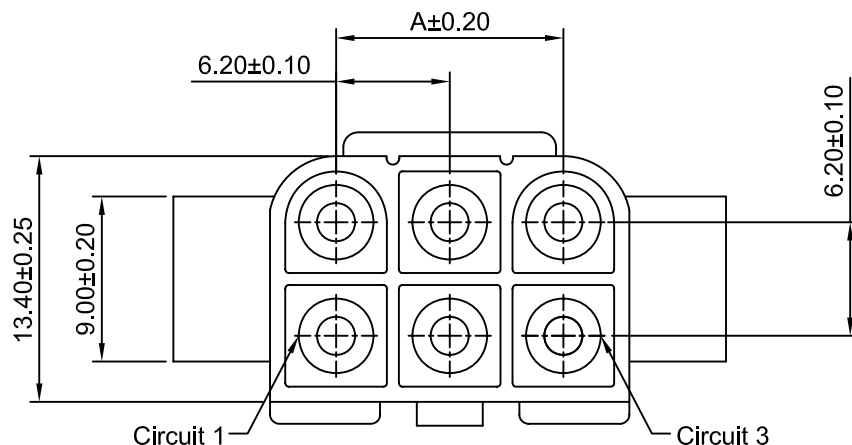

Ordering Information:

C2020HM-2xXP - $\frac{**}{2}$ - $\frac{**}{3}$

1.Part No.

2.Material:

(blank):UL94V-2


V0:UL94V-0

3.Color:



(blank):Natural

WH:White

BK:Black

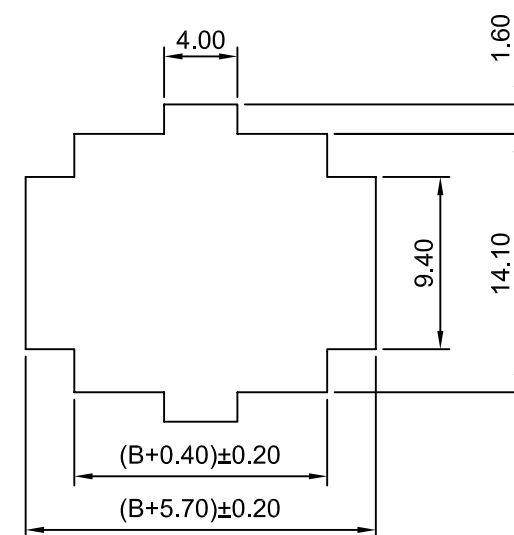

Panel Hole Layout

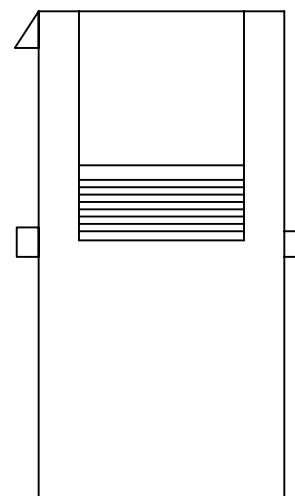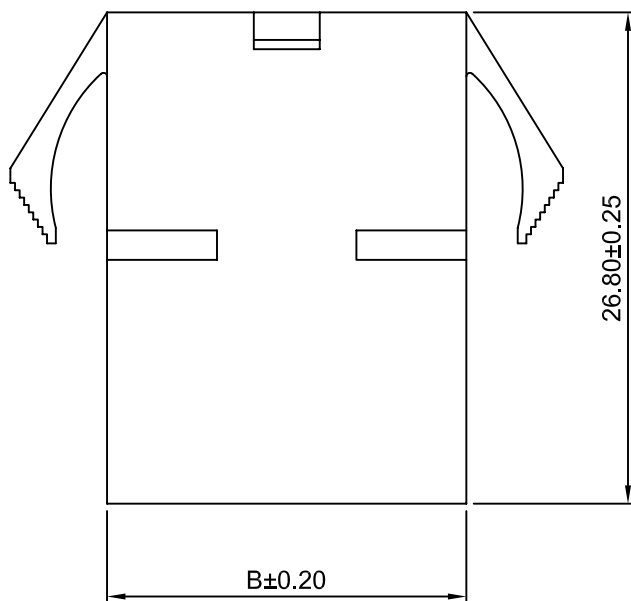

SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: 10m Ω Max

Insulation Resistance: 1000M Ω Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	6.20	13.40	2x3P	12.40	19.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title :

6.20mm PITCH

HOUSING

General Tolerance			ANGLE $\pm$	DRAW NO : C2020HM-2xXP	REV A0
A0	NEW RELEASE	2015.04.10			
REV	DESCRIPTION	DATE	x.x $\leq$ 0.25 x.xx $\leq$ 0.20 x.xxx $\leq$ 0.15		