
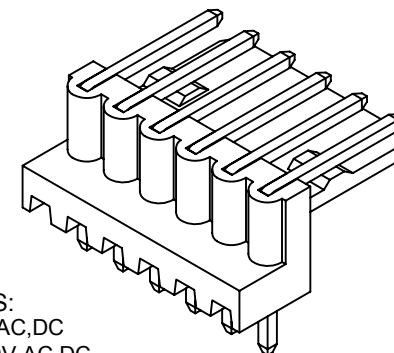
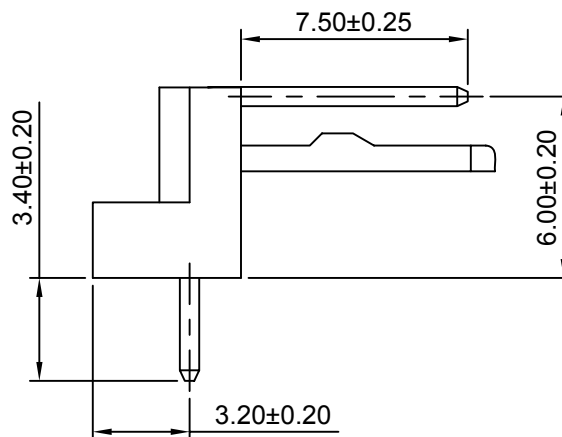

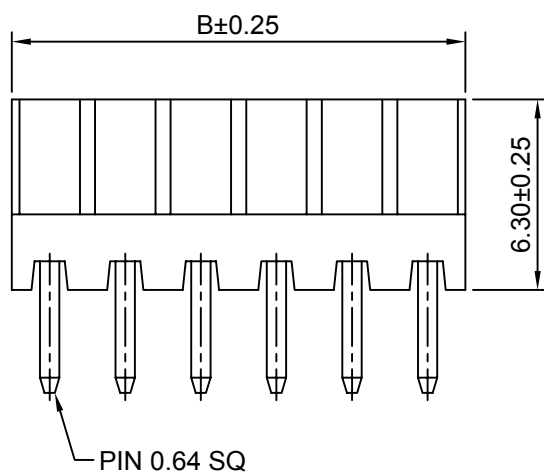


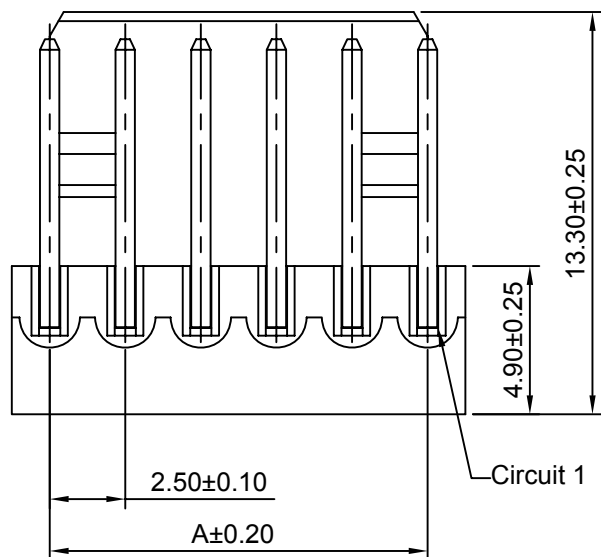

SPECIFICATIONS:
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin over Nickel
 Material: Nylon 66, UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	5.00	12P	27.50	30.00
3P	5.00	7.50	13P	30.00	32.50
4P	7.50	10.00	14P	32.50	35.00
5P	10.00	12.50	15P	35.00	37.50
6P	12.50	15.00	16P	37.50	40.00
7P	15.00	17.50	17P	40.00	42.50
8P	17.50	20.00	18P	42.50	45.00
9P	20.00	22.50	19P	45.00	47.50
10P	22.50	25.00	20P	47.50	50.00
11P	25.00	27.50			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm
 Scale: 4:1
 Sheet: 1 of 1

Draw BY: LIZQ
 Approved: GONGYB

Title: 2.50mm PITCH
 HOUSING

General Tolerance
 x.xx±0.25
 x.xx±0.20
 x.xxx±0.15



DRAW NO: C2504WR-XP

REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEEASE	2005.05.10