
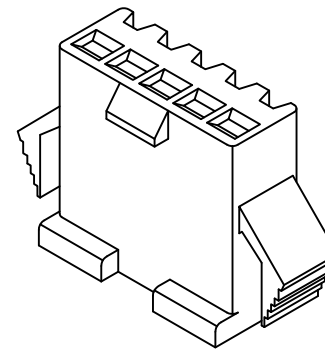


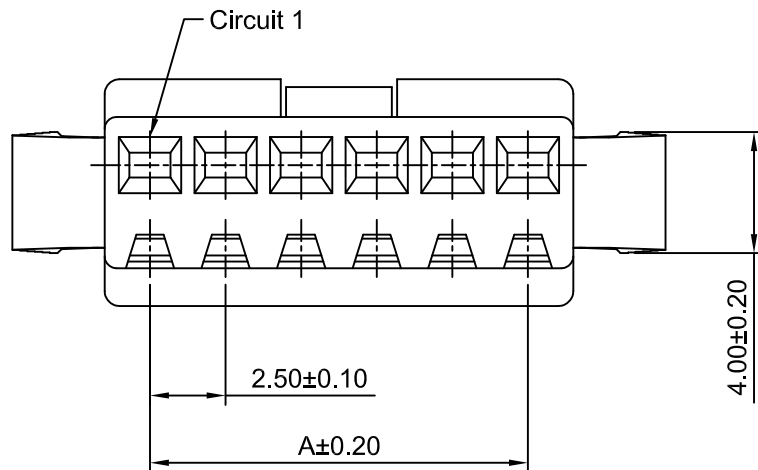

Ordering Information:

C2521HF-XP - ***
1 2

1.Part NO.

2.Color:

(blank): Black

WH: White

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max



Insulation Resistance: 500MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C2521HF-2P	2.50	5.50
C2521HF-3P	5.00	8.00
C2521HF-4P	7.50	10.50
C2521HF-5P	10.00	13.00
C2521HF-6P	12.50	15.50
C2521HF-7P	15.00	18.00
C2521HF-8P	17.50	20.50
C2521HF-9P	20.00	23.00
C2521HF-10P	22.50	25.50
C2521HF-11P	25.00	28.00
C2521HF-12P	27.50	30.50
C2521HF-13P	30.00	33.00
C2521HF-14P	32.50	35.50
C2521HF-15P	35.00	38.00
C2521HF-16P	37.50	40.50

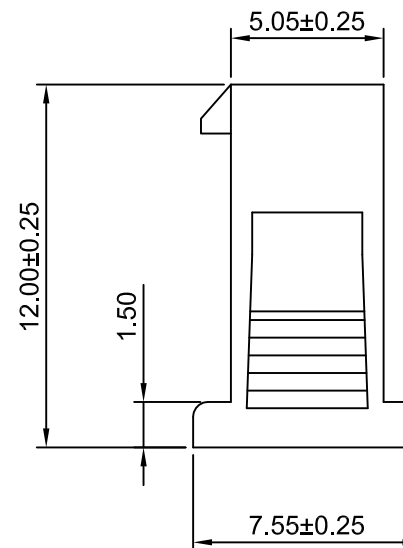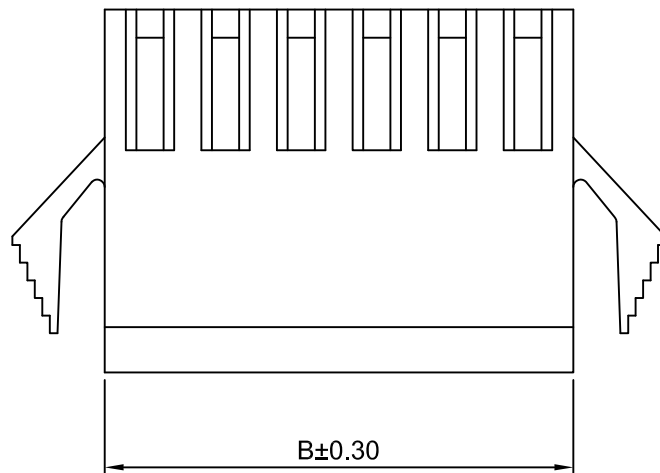

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.50mm PITCH HOUSING	
mm	4:1	1 of 1		
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C2521HF-XP	REV A1
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°				