

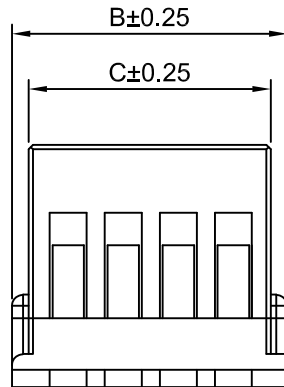
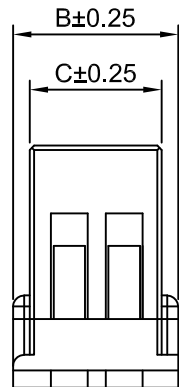
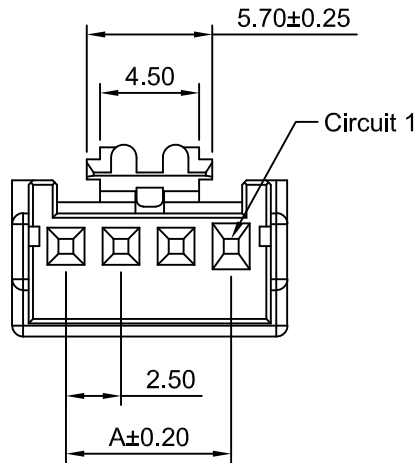




Ordering Information:

C2521HFB-XP - *** - **
1 2 3

1.Part No.

2.Material:

(Blank):Nylon 66, UL94V-0

GWT: Nylon 66,UL94V-0,IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:


(Blank):White

BK:Black

RD:Red

YL:Yellow

BL:Blue

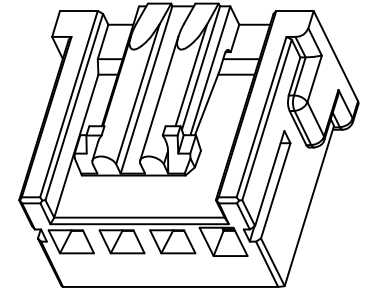

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.50	7.50	6.00	8P	17.50	22.50	21.00
3P	5.00	10.00	8.50	9P	20.00	25.00	23.50
4P	7.50	12.50	11.00	10P	22.50	27.50	26.00
5P	10.00	15.00	13.50	11P	25.00	30.00	28.50
6P	12.50	17.50	16.00	12P	27.50	32.50	31.00
7P	15.00	20.00	18.50				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.50mm PITCH	
DRWN	CHK'D	APPR	SINNGLE ROW HOUSING	
Xu Lei	DianKui Wan	Jack Yin	DRAWING NO. C2521HFB-XP	
General Tolerances			THIRD ANGLE PROJECTION	REV A1
A1	CHANGE THE DRAWING	2022.03.04		
A0	NEW RELEASE	2015.10.12		
REV	DESCRIPTION	DATE		

x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

