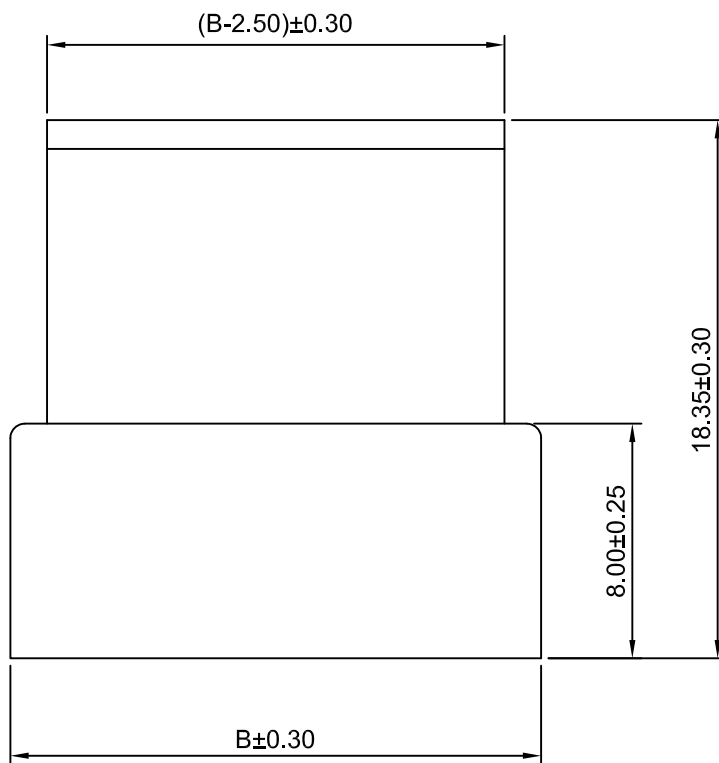
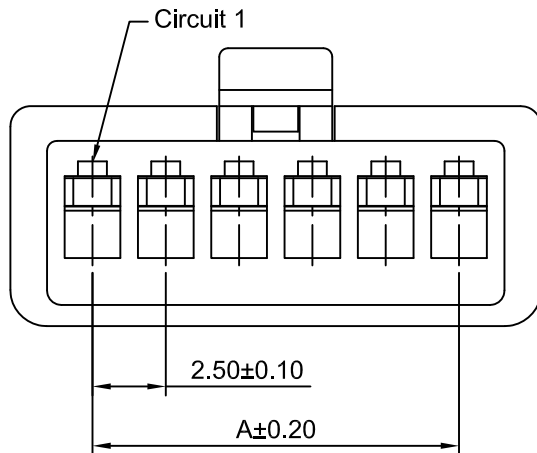


Ordering Information:

C2521HM-XP - **
1 2

1.Part NO.

2.Color:

(blank): Black

WH: White

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C2521HM-2P	2.50	8.10
C2521HM-3P	5.00	10.60
C2521HM-4P	7.50	13.10
C2521HM-5P	10.00	15.60
C2521HM-6P	12.50	18.10
C2521HM-7P	15.00	20.60
C2521HM-8P	17.50	23.10
C2521HM-9P	20.00	25.60
C2521HM-10P	22.50	28.10
C2521HM-11P	25.00	30.60
C2521HM-12P	27.50	33.10
C2521HM-13P	30.00	35.60
C2521HM-14P	32.50	38.10
C2521HM-15P	35.00	40.60
C2521HM-16P	37.50	43.10

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	4:1	1 of 1	2.50mm PITCH HOUSING
DRWN	CHK'D	APPR	
Chengbiao Ye	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C2521HM-XP
x.xx±0.25			
x.xxx±0.20			
x.xxxx±0.15			
ANGLES ±1°			REV A2

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2023.02.07
A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2013.12.11