


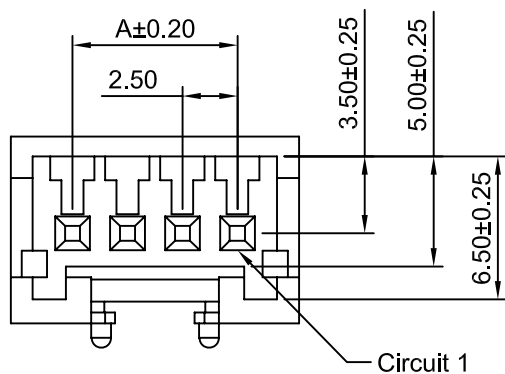

Ordering Information:

C2521HMB-XP - *** **
1 2 3

1.Part No.

2.Material:

(blank):Nylon 66, UL94V-0

GWT:Nylon 66, UL94V-0,GWT 750°C

3.Color:




(blank):White

BK:Black

RD:Red

YL:Yellow

BL:Blue

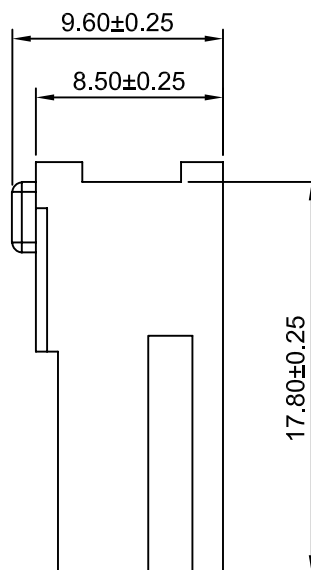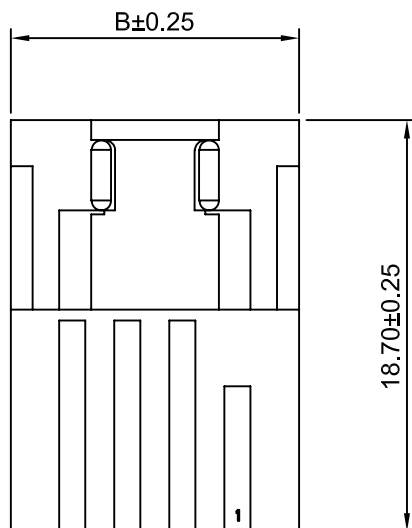

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	8.10	8P	17.50	23.10
3P	5.00	10.60	9P	20.00	25.60
4P	7.50	13.10	10P	22.50	28.10
5P	10.00	15.60	11P	25.00	30.60
6P	12.50	18.10	12P	27.50	33.10
7P	15.00	20.60			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm
Scale: 3:1
Sheet: 1 of 1

Draw BY: LIZQ
Approved: GONGYB

Title:

2.50mm PITCH

SINNGLE ROW HOUSING

DRAW NO: C2521HMB-XP

REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2015.10.12

General Tolerance	
x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	