
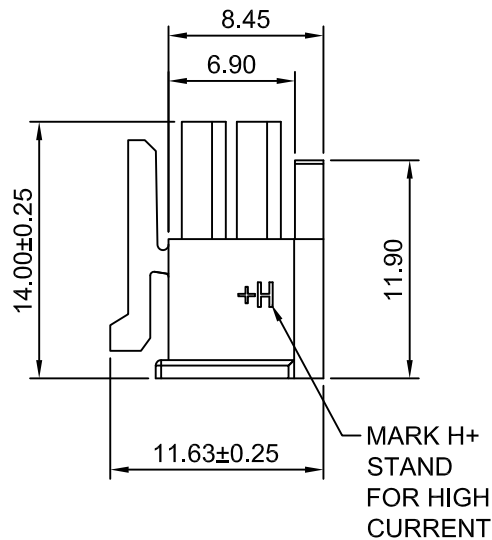
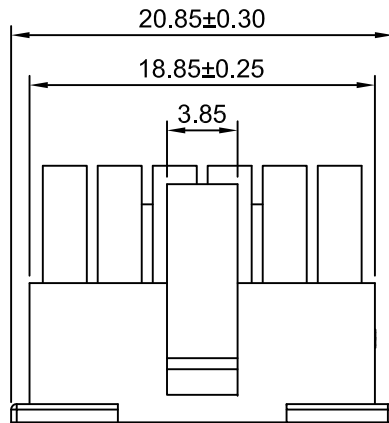


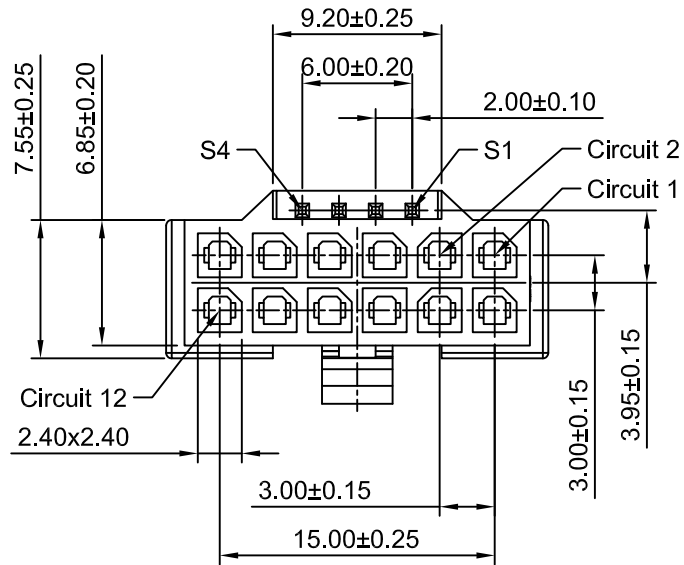

Ordering Information:


C3030HFE-2x6P - ***
1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(Black)

GWT: Nylon 66,UL94V-0(Black),IEC 60335-1,5th Edition
Glow Wire Capable.



SPECIFICATIONS:

Current Rating: 9.5A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(Black)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1	3.00mm PITCH PCI-SIG 12VHPWR H+ HOUSING	
DRWN	CHKD	APPR	DRAWING NO.	
Chengbiao Ye	Diankui Wan	Jack Yin	C3030HFE-2x6P	
General Tolerances			THIRD ANGLE PROJECTION	
A1 CHANGE THE DRAWING 2023.01.12			REV A1	
A0 NEW RELEASE 2022.03.30				
REV DESCRIPTION DATE				