
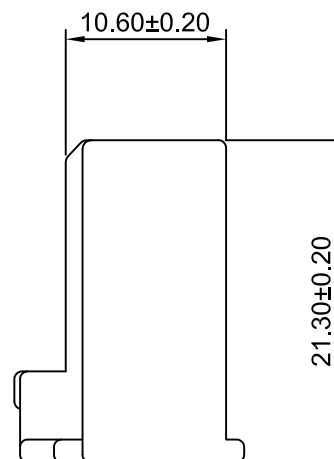
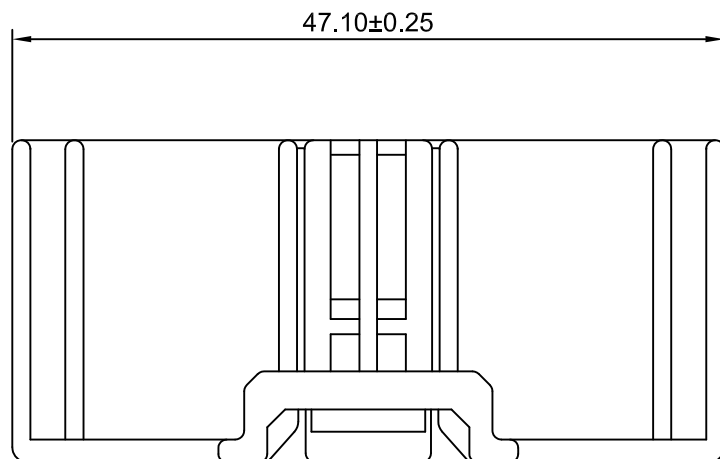


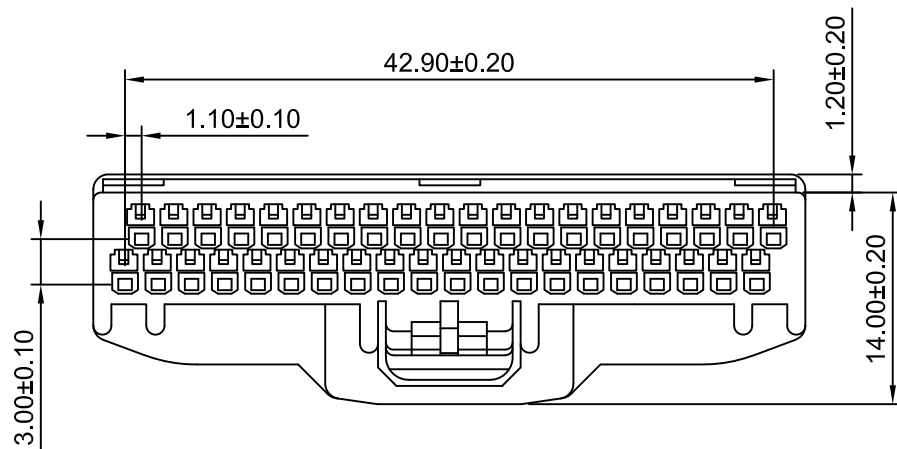

Ordering Information:

C3030HI-40P - ***
1 2

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-0

PBT:PBT,UL94V-0

3.Color:

(blank):Gray

BK:Black

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 5mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0 (Gray)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1

Title :
1.10mm Pitch

Draw By:	Approved :
Diankui Wan	Jack Yin

Housing

General Tolerance		
x.x±0.25	PROJECT	
x.xx±0.20		
x.xxx±0.15		

DRAW NO : C3030HI-40P

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2014.02.26